
China HT

Black Anodized Aluminum Solar Panel Frame 6063-T5 Aluminum Extrusion Profiles

Packed with EP ,Carton ,Pallet or wooden

Basic Information

- Place of Origin:
- Brand Name:
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details:
- Delivery Time: 20days
 - ent Terms: T/T ,L/C
- Payment Terms:
- Supply Ability: 3000tons each month



Product Specification

- Product Name:
- Alloy:
- Material:
- Suface Treatment:
- Deep Process:
- Temper:
- Highlight:

| Aluminum Solar Panel Frame |
|--|
| 6063,6061 |
| Aluminum |
| Mill Finished, Anodized , Electrophoretic Coated |
| Cutting , Punching |
| Τ5 |

aluminium solar panel frame, anodized aluminum frame



Our Product Introduction

Product Description

Black Anodized Aluminum Solar Panel Frame 6063-T5 Aluminum Extrusion Profiles

Product Details

| Item | Black Anodized Aluminum Solar Panel Frame 6063-T5 Aluminum Extrusion Profiles |
|-----------------------|--|
| Material | Aluminium 6000 series alloy: such as 6063 6005 6061 |
| Temper | T4 T5 T6 |
| length | 3-6 Meter per piece, or as your inquire |
| Snane | Round,square,flat,hollow,oval,triangle,U-profile,L-profile,T- profile,customized avaiable |
| Thickness | General profile Thickness: 0.7 - 5.0mm |
| Deep process | CNC ,drilling ,milling ,cutting ,bending ,tapping ,welding ,assembling ,punching |
| Frame Section Size | 30mm*35mm ,35mm*35mm ,35mm*40mm ,30mm*46mm ,35mm*45mm ,35mm*50mm etc |

Solar panels (photovoltaic modules) aluminum frame

- A. Solar module aluminum frame Size Description:
- 1) 17 * 17, 20 * 20, 23 * 17, 25 * 25, 28 * 25mm, etc., suitable for solar street lamps and other small solar power generation equipment;
- 2) 30 * 25, 35 * 30mm, suitable for 30-100W solar modules;
- 3) 35 * 35mm, suitable for 80-180W solar modules, length is generally 1580 * 808mm (the most common frame size);
- 4) 40 * 35mm, suitable for 120-200W solar modules, length is generally 1580 * 808mm;
- 5) 45 * 35mm, suitable for 180-250W solar modules, length is generally 1580 * 808 and 1650 * 992mm;
- 6) 50 * 35mm, suitable for 200-300W solar modules, length is generally 1650 * 992 and 1960 * 992mm;

7) Many other customized according to customer's special sizes, such as 40 * 28mm, 40 * 30mm, 42 * 35mm, 46 * 30mm, 46 * 35mm, 46 * 40mm, 46 * 48mm, 46 * 50mm, 46 * 60mm, 60 * 35mm and so on.

B. Two types:

- 1) 90 Angle (screw border)
- 2) 45 corner (Corner Borders)
- C. Surface treatment:
- 1) Anodized (silver, bronze, black, gold, silver, other colors)
- 2) Electrophoresis
- 3) powder coating, PVDF, polishing, sand blasting
- Standard: GB/T5237 2004, Q/320281PDW01-2008
- Size: According to your design drawings, model
- Note: 1. Various sizes for our existing solar frame, without open new mold.
- 2 aluminum frame is very popular in Europe.
- 3. We can follow your design drawings requirements. If you are interested in our products, please contact us, thank you.

for more products please visit us on aluminumextrusion-profiles.com

太阳能系列

HD太阳能系列型材图

| 新图号 | 简 图 | 线密度 | 新图号 | 简图 | 线密度 kg/m |
|------------------|-----------|-------------|-------|----------------|-------------|
| 旧图号 | | 线密度 kg/m | 旧图号 | | |
| GT001 | 45.1 | 0.987 | GT607 | 95 S | 0.803 |
| G701 | 45.1 | | G007 | 30 | |
| GT002 码为GT001 | 55 10 | 0.530 | GT008 | 9 | 0.633 |
| G702 | 35 | | G008 | 25 | |
| GT003 | 8.5 \$ | 0.615 | GT009 | ** La La La | 0.494 |
| G795 | 25 | | G009 | 25 | |
| GT004 | 8.5 | 0.466 | GT010 | | 0.496 |
| G794 | 16 | | G010 | | |
| GT005 | 9 | 0.814 | GT011 | 6 | 0.388 |
| G590 | 50 | 6011 G011 | ¥. | | |
| GT006 | 99 | 0.681 | GT012 | 28 | 0.290 |
| G591 | 40 | | G012 | , | |

HD太阳能系列型材图 国家免检

| 新图号 | - 篩 图 | 线密度 | 线察班 新图号 林 四 | 44 100 | 线密度 kg/m |
|-------|--------|-------|-------------|--------------|-------------|
| 旧图号 | | kg/m | 旧图号 | 简图 | |
| GT013 | 40 | 0.372 | GT019 | 07 07 | 0.665 |
| G778 | 1 | | G599 | 35 | |
| GT014 | ****** | 0.367 | GT020 | 000 H | 0.400 |
| G594 | 25 | | G846 | | |
| GT015 | 52 | 0.183 | GT021 | ¥ | 0.884 |
| G595 | | | Z081 | + U. | |
| GT016 | 8 | 0.248 | GT022 | 11.6 5252 | 1.228 |
| G596 | | | Z082 | 50 | |
| GT017 | x 30 | 0.534 | GT023 | 9 | 0.952 |
| G597 | | | Z083 | 67 | |
| GT018 | 00 | 0.339 | GT024 | 51.5 51.5 | 1.073 |
| G598 | | | Z084 | 50 | |

太阳能系列 Solar energy series

HD太阳能系列型材图


| 新图号 | 简图 | 线密度 | 新图号 | | elt ster nie |
|-------------------|------|-------|-------------------|------------|--------------|
| 旧图号 | 100 | kg/m | | | 线密度 kg/m |
| GT025 角码为GT026 | 8.5 | 0.653 | GT031 | 7.6 5E | 0.548 |
| G895 | 38 | | G893 | 30 | |
| GT026 | 40.2 | 0.732 | GT032 | 7.6 SE | 0.279 |
| G896 | 40.2 | | G894 | | |
| GT027 角码为GT026 | 8.5 | 0.424 | GT033 | 46.4 | 1.711 |
| G915 | 28 | | G913 | 46.4 | |
| GT028 角码为GT026 | 8.5 | 0.524 | GT034 角码为GT033 | 05 | 0.745 |
| G916 | 35 | | G914 | 35 | |
| GT029 | 42 | 1.300 | GT035 | 05 | 0.398 |
| G822 | 42 | | G222 | Ļ | |
| GT030 角码为GT029 | s T | 0.567 | GT036 | 1.5 1.5 | 0.754 |
| G823 | 35 | | G224 | 35 | |


HD太阳能系列型材图 国家免检

| 新图号 | Ark 1941 | 线密度 | 新图号 | date that | 始感症 |
|-------------------|------------|-------|-----------|-----------|-------------|
| 旧图号 | 简图 | kg/m | 旧图号 | 简图 | 线密度 kg/m |
| GT037 | 52 | 0.172 | GT052 | 4 t | 0.728 |
| G229 | | | | 1 | |
| GT038 | S S S S | 0.374 | GT054 | | 0.509 |
| G230 | 25 | | 角码为 GT052 | 35 | |
| GT039 | 99 11.5 | 0.626 | | | 0.537 |
| G889 | 30 | | 角码为GT052 | 35 | |
| GT040 | 46 | 0.756 | GT061 | 33 | 0.161 |
| G888 | 50 | | | , | |
| GT041 1码为GT026 | 30 | 0.692 | GT062 × | <u>₹</u> | 0.340 |
| G187 | 35 | | | 25 | |
| GT042 1码为GT026 | 35 | 0.443 | GT063 | 30 | 0.209 |
| G789 | 35 | | | | |

太阳能系列 Solar enemy service

HD太阳能系列型材图

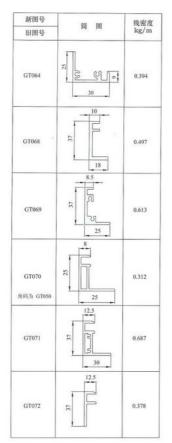

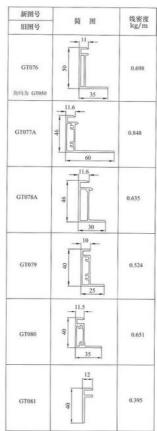

213 线密度仅供参考,出货以实际磅重为准!

HD太阳能系列型材图 国家免检 新图号 新图号 线密度 kg/m 简图 简图 旧图号 旧图号 12 GT082 2 0.245 GT088 9 16.5 30 GT083 0.267 GT089 46 30 GT091 0.519 45 GT084 32 魚蚂为 GT092 G791 30 35 GT092 4 \$ GT085 0.646 ÷ G792 48 30 11.5 19 GT086 0.674 GT093 50 37 35 角码为 GT09--11.6 ī 0.655 6.9 40 GT087 GT094 35 线密度仅供参考,出货以实际磅重为准! 214

线密度 kg/m 0.677 0.558

> 0.580 0.967 0.832 1.519

