China HENTEC

# Nautral Aluminum Solar Panel Frame 6063-T5 With Oxidized / Anodizing

# **Basic Information**

- Place of Origin:
- Brand Name:
- CA ,CE Certification:
- Minimum Order Quantity: 1 ton Packaging Details: Packed with EP ,Carton ,Pallet or wooden
- case
- Delivery Time: 20days T/T ,L/C
- Payment Terms:
- Supply Ability:



- Product Name:
- Alloy:
- Material:
- Suface Treatment:
- Deep Process:
- Temper:
- Highlight:

Aluminum Solar Panel Frame

20000tons each month


- 6063,6061,6005
- Aluminum

**Product Specification** 

Auminum	Julai I	anei	1	iai
0000 0001	0005			

- Anodized
  - Milling, Drilling, Bending, Cutting
  - T4, T5, T6
  - aluminium solar panel frame, solar panel aluminum frame

# More Images





#### **Product Description**

Nautral Aluminum Solar Panel Frame , 6063-T5 / With Oxidized / Anodizing
Factory Capacity:

CNC cutting:8 sets
CNC lathe: 7 sets
CNC machining center: 4 sets
Extrusion lines: 25sets

The oxidize aluminum materials length is up to 10m, electrophoretic materials length is up to 7.5m, with an annual output of 240000tons.
With 6 powder coating lines from Italy.

More Information:

- 1. Material: Aluminium alloy 6063, 6061.
- 2. Temper: T5, T6.
- 3. Quality standard: DIN; AAMA; AS/NZS; CHINAGB.
- 4. Surface treatment: anodized etc.
- 5. Color available: Anyone is available based on your color samples.

6 .Packing details: Shrinking film; Plastic & kraft paper; Wooden pallet Carton packing; By customer's requirements.

- 7.Samples Time: Normally, 2-3 weeks.
- 8.Delivery: 25-30 days for mass production.
- 9. Production Capacity: 20 000MT/Month
- 10.MOQ: It's based on the drawings. Basically, it's 1 tons.
- 11.Port: Shanghai ; As per requested.



Our Advantages!

1. 22 years' experiences of manufacturing .

2. Strong R&D: Help customers finalize the design, strong tool design ability, excellent pressing and surface treament technology.

- 3. Strict quality management: ISO Administration system.
- 4. 24 hours on-line communication. Professional, Patient, Flexible.
- 5. High capacity of manufaturing and wide range of products.

- 6. Be able to provide secondary fabricating.
- 7. Small order is accepted.
- 8. Be able to provide one-stop supply solution.
- 9. Multiple payment methods: TT, LC .

太阳能系列

HD太阳能系列型材图

新图号	A.4. 1944	始密府	新图号	- <b>1</b> 11	60: che nhe
旧图号	简图	线密度 kg/m	旧图号	简图	线密度 kg/m
GT001	0.987	GT607	8	0.803	
G701	45.1		G007	30	
GT002 角码为GT001	54	0.530	GT008		0.633
G702	35		G008		
GT003	8.5 St	0.615	GT009	× 25	0.494
G795	25		G009		
GT004	8.5	0.466	GT010	02	0.496
G794	16		G010		
GT005	4 11.6	0.814	GT011	6	0.388
G590	50		G011	¥	
GT006	+11.6 9	0.681	GT012	38	0.290
G591			G012		

## HD太阳能系列型材图 国家免检

新图号	线密度	新图号	44 100	线密度	
旧图号	5 6 图 号	kg/m	旧图号	简图	kg/m
GT013	0.372	GT019	07 07	0.665	
G778	1		G599	35	
GT014	0.367	GT020		0.400	
G594	25		G846		
GT015	r015	0.183	GT021	¥	0.884
G595			Z081	60	
GT016	32	0.248	GT022	11.6 5252	1.228
G596		ZO	Z082	50	
GT017	<u>د</u> س	0.534	GT023	9	0.952
G597	30		Z083	67	
GT018		0.339	GT024	51.5 51.5	1.073
G598			Z084	50	

太阳能系列 Solar energy series

## HD太阳能系列型材图


新图号	简图	线密度	新图号		(t) site site
旧图号	3图号		简图		线密度 kg/m
GT025 角码为GT026	8.5 8.5	0.653	GT031	7.6 5E	0.548
G895	38		G893	30	
GT026	40.2	0.732	GT032	7.6 SE	0.279
G896	40.2		G894		
GT027 角码为GT026		0.424	GT033	46.4	1.711
G915	28		G913	46.4	
GT028 角码为GT026	*	0.524	GT034 角码为GT033	00	0.745
G916	35		G914		
GT029	42	1.300	GT035	05	0.398
G822	42		G222	Ļ	
GT030 角码为GT029	SE L	0.567	GT036	1.5 05	0.754
G823	35		G224	35	


# HD太阳能系列型材图 国家免检

新图号	Ark 1941	线密度	新图号	Adv but	始感神
旧图号	简图	kg/m	旧图号	简图	线密度 kg/m
GT037	52	0.172	GT052	4 t	0.728
G229				1	
GT038	S S S S	0.374	GT054		0.509
G230	25		角码为 GT052	35	
GT039	99 11.5	0.626			0.537
G889	30		角码为GT052	35	
GT040	46	0.756	GT061	33	0.161
G888	50			,	
GT041 1时为GT026	30	0.692	GT062 ×	<u>₹</u>	0.340
G187	35			25	
GT042 1码为GT026	35	0.443	GT063	30	0.209
G789	35				

太阳能系列 Solar enemy service

HD太阳能系列型材图

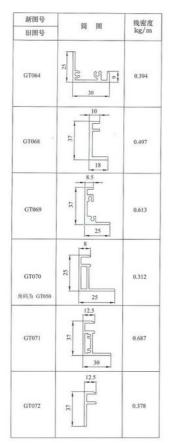

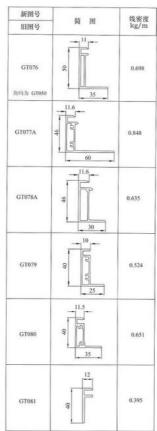

213 线密度仅供参考,出货以实际磅重为准!

HD太阳能系列型材图 国家免检 新图号 新图号 线密度 kg/m 简图 简图 旧图号 旧图号 12 GT082 s 0.245 GT088 9 16.5 30 GT083 0.267 GT089 46 30 GT091 0.519 45 GT084 32 魚蚂为 GT092 G791 30 35 GT092 4 \$ GT085 0.646 ÷ G792 48 30 11.5 19 GT086 0.674 GT093 50 37 35 角码为 GT09--11.6 ī 0.655 6.9 40 GT087 GT094 35 线密度仅供参考,出货以实际磅重为准! 214

线密度 kg/m 0.677 0.558

> 0.580 0.967 0.832 1.519

#### Applications:

- Living house and home building.
   Commercial building, factory, shopping mall, school, stadium etc.
- 3) Power station, field operation and some huge engineer construction.

#### **Competitive Advantage:**

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



## **HENTEC** Hentec Industry Co.,Ltd



aluminum@hentec.com.cn

@ aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421