



Customized Anodize Aluminum Heatsink Extrusion Profiles For LED Housing

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: HENTEC
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 25days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month




Product Specification

- Product Name: Aluminum Heatsink Extrusion Profiles
- Alloy: 6063,6061,6005
- Material: Aluminium
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T5, T6 ,T66
- Highlight: **heatsink extrusion profiles,
aluminium extrusion heat sink profiles**

for more products please visit us on aluminumextrusion-profiles.com

Product Description


Customized Anodize Aluminum Heatsink Extrusion Profiles For LED Housing

Description:

Hentec Industry is specialize in develop, manufacture and marketing of high-performance aluminum Heat sink We have 15 years export experience !

Our advantages:

- 1) Quick response within 24 hours.
- 2) Manufacturer with 11 years experiences.
- 3) High quality and competitive price.
- 4) OEM/ODM: custom fabrication according to your drawings or samples.
- 5) Small order is acceptable.
- 6) Certification: ISO9001:2008, TUV, SGS.

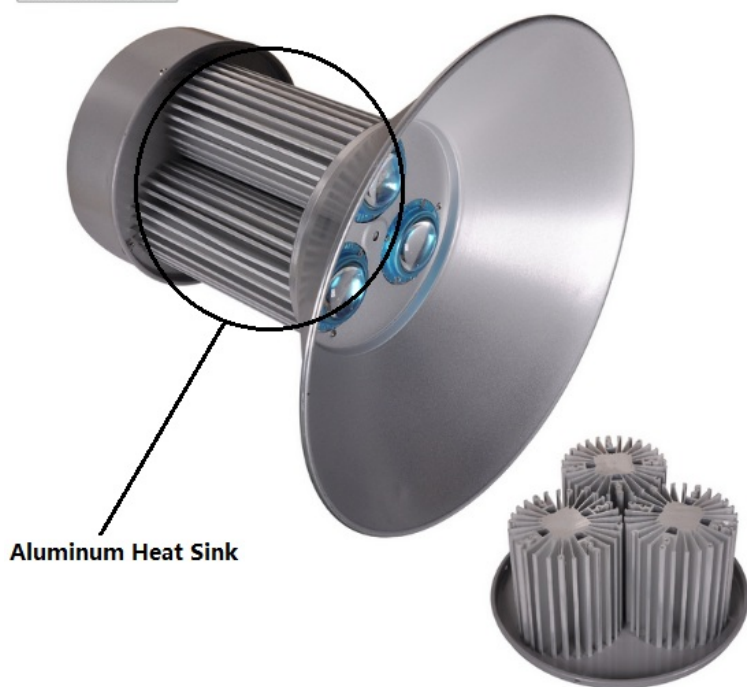

Aluminum Heat Sink

1	Business type:	Manufacturer
2	Standard:	GB 5237-2008
3	Product series:	Aluminium profile for building material and industrial material
4	Price:	Based on SMM Aluminium Ingot price(www.smm.cn) + processing Fee
5	Payment term:	T/T, L/C at sight
6	Surface treatment:	Anodizing, Powder coating, electrophoresis, wooden finish
7	Specification:	A. Alloy: 6063, 6060, 6061, 6005 B. State: T5/T6 C. Length: 1m-7m D. Normal Anodizing thickness: 8-20micro E. Normal powder coating thickness: 60-120 micro F. Tensile strength: ≥ 16 mpa G. Yield strength: ≥ 110 mpa H. Extensibility: $\geq 8\%$ I. Hardness(HW): ≥ 8
8	Packing:	Kraft paper, EPE Fram, Shrink film, Composite paper
9	MOQ:	1TON
10	Delivery time:	15-30 days if the mould is ready
11	Normal order sequence:	1. Confirm the drawings, colors and price; 2. Pay the mould fee and we start to make moulds; 3. We send samples to you for your confirmation; 4. Make the payment of 30% deposit, start production; 5. Delivery.

Applications:

Aluminum heat sink is widely used on Machines , cars , lighter ...

Specifications:**1. Primary Technical Data****1) Chemical composition**

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2) Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

**Competitive Advantage:**

1.Our products can be CUSTOMIZED (OEM).Provide us your drawing or give us your specific requirments,we have excellent engineer team design for you!

2.We provide aluminum profiles for different applications include:
door and windows aluminum, industrial aluminum profiles, aluminum heatsink
and everything about aluminum!



HENTEC Hentec Industry Co.,Ltd

+86-13861643436

aluminum@hentec.com.cn

aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421