Siver Color Aluminum Window Extrusion Profiles For Sliding Window / **Casement Window**

Basic Information

. Place of Origin: China **HENTEC** . Brand Name: CA,CE · Certification: Minimum Order Quantity: 1 ton

 Packaging Details: EP Paper ,kraft and pallet

Delivery Time: 20days T/T or L/C • Payment Terms:

• Supply Ability: 100 000 ton each month



Product Specification

Material: Aluminum Alloy

• Temper: T5 / T6 6063 / 6061 • Alloy: • Surface: Powder Painting · Color: Customerized

Standard: EN755, ASTMB221, DIN Standard

• Highlight: aluminum extrusion profiles, extruded aluminium profiles



Product Description

Powder Coated Aluminum Window Extrusion Profiles For Sliding Window / Casement Window

Descrition:

- 1. Window and Door Aluminum profile for European market
- 2. Simple and easy for instanllation.
- 3. Surface Finish: Anodized, Powder Coating or as your requested
- 4. Good wear and corrosion resistance
- 5. Smoothness, attractive and elegant looking to meet your perferences.
- 6. We previde One Package Service: Extruding, Milling, Precise Cutting, Special surface treatment and packing, etc


1	Business type	Manufacturer
2	Standard:	GB 5237-2008
3	Product series	Aluminum profile for building material and industrial material
4	Price	Based on Aluminum Ingot price + processing Fee
5	Payment term	T/T, L/C at sight
6	Surface treatment	Anodizing, Powder coating, electrophoresis, wooden finish
7	Specification	A. Alloy: 6063, 6060, 6061, 6005
		B. State: T5/T6
		C. Length: 1m-7m
		D. Normal Anodizing thickness: 8-12 micro
		E. Normal powder coating thickness: 60-100 micro
		F. Tensile strength: ≥ 16 mpa
		G. Yield strength: ≥ 110 mpa
		H. Extensibility: ≥ 8%
		I. Hardness(HW): ≥ 8
8	Packing	Kraft paper, EPE Fram, Shrink film, Composite paper
9	MOQ	1ton
10	Delivery time	15-30 days if the mold is ready



Description Material Thickness(t) Material Annealing Treatment Color	aluminum profile windows and door t=1.0 / 1.2 / 1.4 Aluminum Alloy 6063, 6061 T5, T6 Green, Grey, Black, White, (RAL series)etc.
Surface Treatment	Mill finish, anodized, powder coated, electrophoresis, sand balsting etc.and depend on customer's demand. Square, Round, Flat, Oval, and according to customer's drawing.
Length	Normal length=6m or in customer's order
Usage	Building, Production Line, Decoration, Industrial, Transportation, Door and window, etc.
Package	Pearl cotton foam for each aluminum profile; Wrap with kraft exterior; Packed according to customer request.
Advantages/Features	Providing colorful products with various mechanical performances to adapt all kinds of architectural styles

Window and Door's Design

We can DIY any type of aluminium windows and doors as your request, and our popular types are as below:

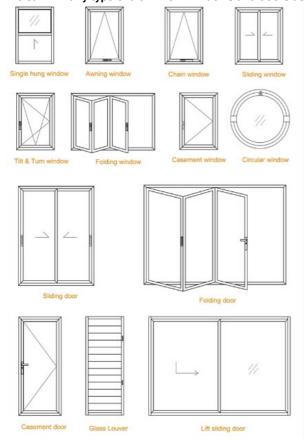

4. Factory Capacity:

Die Center

CNC cutting: 6 sets

CNC machining center: 4 sets

Extrusion Lines

Extrusion lines: 22 sets imported from Japan, Italy .

Anodizing Lines

4 Anodizing lines .

The oxidize aluminum materials length is up to 10m, electrophoretic materials length is up to 7.5m.

Powder coating lines

With 4 powder coating lines from Italy and 4sets of guns from Switzerland

Competitive Advantage:

- 1. Top Aluminium profile manufacturer for more than 10 years in China.
- 2. Diverse Products used in the fields of construction, industry and deep-processing.
- 3. Quality Control is put in the core position of our production.
- 4. Customized Production shows our capability in product design and process control.
- Perfect Customer Services include careful packaging, quick delivery and good after-sale service.



⇒HENTEC Hentec Industry Co.,Ltd



+86-13861643436



aluminum@hentec.com.cn



aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421