



Customized Size Extruded Aluminum Tube Profile High Corrosion Resistant

Our Product Introduction

for more products please visit us on aluminumextrusion-profiles.com

Basic Information

- Place of Origin: China
- Brand Name: HENTEC
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft and pallet
- Delivery Time: 20days
- Payment Terms: T/T or L/C
- Supply Ability: 100 000ton each month



Product Specification

- Product Name: Aluminum Profile
- Alloy: 6063,6061
- Surface Treatment: Fluorocarbon Powder Spray Coated /PVDF Paint, Drawbench,Steel Polished
- Material: Aluminum
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T6
- Highlight: **structural aluminum extrusions,**
structural aluminium extrusions



Product Description

Customized Size Extruded Aluminum Tube Profile High Corrosion Resistant

1. Description: Aluminum Profiles
2. Alloy temper: 6061/6063-T6/T5;
3. Standard: EN755, ASTM B221, DIN Standard
4. Surface treatment: Mill finishes; Anodized; Powder coated, wooden grain, polished, brushed.
5. Application: Construction; Window; Door; Decoration; Architecture and etc.
6. Advantage:
 - 1) Pure 99.7% aluminum materials without any scrap used
 - 2) OEM welcome, we can design and cut die to meet customer's special demand
 - 3) Wonderful surface treatment, we can meet customers required on surface
 - 4) Strictly quality control process assured higher quality.
 - 5) Packing safety and convenient.

Order, payment, terms, shipment

- 1, Minimum order: 500kg per trial order 1 piece of sample free of charge provided by approval and kept for future mass production.
- 2, Sample Lead Time: 25 working days(15 days for making the tool and 10 days making the samples. Before sending the samples to customer, samples should pass strict test in our lab.)Production Lead time: it depends on customers' order quantity (30 working days after deposit).
- 3, Payment: (Can negotiate with customers, our usual practices are as follow)
- 4, Tooling:100% prepaid by T/T.
- 5, Parts:30% upon order confirmation and balance before delivery by T/T

Applications:

Commercial center, hospital, school and airport, etc

Specifications:

1. Primary Technical Data

1) Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2) Mechanical property


Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

3. Surface Treatment of Sections

(Class)	(μm), not diminish than		acid-resistant			abrasion resistance
	(Min-average film thickness)	(Min-part film thickness)	CASS		(S)	(f, g /μm)
			(h)	Class		
AA10	10	8	16	≥9	≥50	≥300
AA15	15	12	32	≥9	≥75	≥300
AA20	20	16	56	≥9	≥100	≥300
AA25	25	20	72	≥9	≥125	≥300

Competitive Advantage:

We focus on the technological development, manufacture and trade of aluminum alloy products. We have 22 extrusion lines, 3 anodizing lines, 3 powder coating lines and 1 electrophoresis coating lines. Moreover, there are also more than 40 sets of processing machines, such as CNC, Milling Machine, Lathe, Drilling Machine and Punching Machine. Therefore, we have become an aluminum product production base for many famous companies both from domestic and overseas.

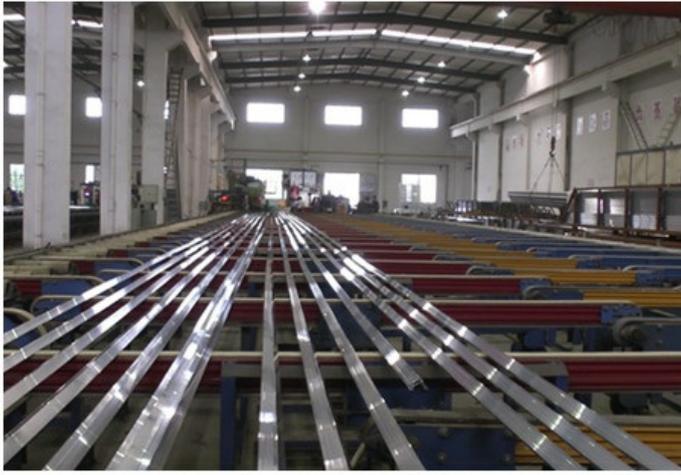

HENTEC Hentec Industry Co.,Ltd

+86-13861643436

aluminum@hentec.com.cn

aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421