HENTEC **Hentec Industry Co.,Ltd** aluminumextrusion-profiles.com

Custome 60 × 35mm Solar Panel Aluminium Frame Electrophoresis Aluminum **Extrusion Profiles**

Basic Information

. Place of Origin: China НТ . Brand Name: CA,CE · Certification: Minimum Order Quantity:

• Packaging Details: Packed with EP ,Carton ,Pallet or wooden

. Delivery Time: 20days T/T ,L/C • Payment Terms:

3000tons each month Supply Ability:



Product Specification

• Product Name: Aluminum Solar Panel Frame

Alloy: 6063,6061,6005 • Material: Aluminum

Mill Finished, Anodized , Electrophoretic Suface Treatment:

Coated, Powder Spray Coated

• Deep Process: Milling, Drilling, Bending, Cutting

T4, T5, T6, T66 • Temper:

· Highlight: aluminium solar panel frame, solar panel aluminum frame



More Images



Product Description

Custome 60 x 35mm Solar Panel Aluminium Frame Electrophoresis Aluminum Extrusion Profiles

1)temper:T3-T6

2)certificate:ISO9001:2008

3)surface treatment:anodize

Description:

Aluminum Extrusion Solar Panel Frame

Aluminum solar frame is widely used as the frame of solar panel, and then it is also called as aluminum solar panel frame. Our aluminum solar frames adopt L connector or screw joint, resulting in well fixed structure with durability. They are of high quality and at low price.

Features:

- 1) 30*25 suitable for 30-120W solar modules
- 2) 35*35 suitable for 80-180W solar modules
- 3) 50*35 suitable for 160-220W solar modules
- 4) Many other custom made sizes available, such as: 45*35mm, 60*35mm, 46*40mm, 46*50mm, etc.

Specifications:

Item	Aluminum Extrusion Solar Panel Frame
Material	Alloy 6063, 6061 or according to customer's choice
Temper	T3, T4, T5, T6
Surface	Anodize (clear, satin, bronze, black, golden, silver, other multicolor), electrophoresis, powder coating, PVDF coating, wood grain painting, etc.
Color	Any color based on Standard Germany RAL Mark
MOQ	1 ton. Usually 12 tons for a 20 feet container; 24 tons for a 40 feet container.
Profile type	used as the frame of solar panel
Fabrication	1. Milling; 2. Drilling; 3. Bending; 4. Cutting.
Moulding	Using our moulds, free; 2. Using customer's drawing, opening mould fee need to be paid.
Mould size	25*25, 35*35,30*46, 46*50, 30*25, 40*40 ,50*35,etc.We can provide customized aluminum solar frames upon to customers' request.
FOB Port	Shanghai, etc.

- 1.Alloy:6063,6061,6005 or according to customer's choice
- 2.Material:Aluminum
- 3.Suface Treatment: Mill Finished, Anodized , Electrophoretic coated, Powder spray coated, Fluorocarbon powder spray coated /PVDF Paint, Drawbench, Steel polished, Wood grain coated /Wooden transfer .
- 4.Deep process: Milling, Drilling, Bending, Cutting.
- 5. Application: Aluminum solar frame is widely used as the frame of solar panel.
- 6. Color:clear, satin, bronze, black, golden, silver, other multicolor
- 7.Temper: T4, T5, T6, T66

太阳能系列

HD太阳能系列型材图

新图号	简图	线密度	新图号	Adv. Dat	给您的
旧图号	间图	线密度 kg/m	旧图号	简图	线密度 kg/m
GT001	45.1	0.987	GT607	08	0.803
G701	45.1		G007	30_	
GT002 育码为GT001	\$4	0.530	GT008	0 0	0.633
G702	35		G008	25	
GT003	\$5 8.5	0.615	GT009	* 12	0.494
G795	25		G009	25	
GT004	8.5	0.466	GT010	11.5	0.496
G794	16		G010	1	
GT005	9	0.814	GT011	04	0.388
G590	50		G011	<u>. </u>	
GT006	11.6	0.681	GT012	9	0.290
G591	40		G012		

209 线密度仅供参考,出货以实际磅重为准!

HD太阳能系列型材图 国家免检

新图号	简图	60.567107	新图号	简 图	40 s81 m²
旧图号	Jel 131	线密度 kg/m	中國日	简 图	线密度 kg/m
GT013	9	0.372	GT019	11.5	0.665
G778	17		G599	35	
GT014		0.367	GT020	12	0.400
G594	25		G846		
GT015	7	0.183	GT021	9	0.884
G595			Z081	60	
GT016	32	0.248	GT022	11.6	1.228
G596			Z082	50	
GT017	38 MJ	0.534	GT023	94	0.952
G597	30		Z083	67	
GT018	11.5	0.339	GT024	\$25	1.073
G598			Z084	50	

线密度仅供参考,出货以实际磅重为准! 210

太阳能系列 Solar energy saries

HD太阳能系列型材图

新图号	简图	线密度	新图号	简图	éb sés sir
旧图号	(0.57 300)	线密度 kg/m	日图号	简图	线密度 kg/m
GT025 角码为GT026	8.5	0.653	GT031	7.6	0.548
G895	38		G893	30	
GT026	40.2	0.732	GT032	7.6	0.279
G896	40.2		G894		
GT027 值码为GT026	8.5	0.424	GT033	46.4	1.711
G915	28		G913	46.4	
GT028 等码为GT026	***	0.524	GT034 角码为GT033	92	0.745
G916	35		G914	35	
GT029	42	1.300	GT035	95	0.398
G822	42		G222		
GT030 的码为GT029	35	0.567	GT036	11.5	0.754
G823	35		G224	35	

211 线密度仅供参考,出货以实际磅重为准!


新图号	简图	线索度	新图号	简图	(4) (秦) (6)
旧图号	Ind Titl	线密度 kg/m	日图号	简图	线密度 kg/m
GT037	22	0.172	GT052	40.2	0.728
G229	Ш			1	
GT038	7	0.374	GT054	*	0,509
G230	25		角码为 GT052	35	
GT039	99	0.626	GT055	38	0.537
G889	30		角形为GT052	35	
GT040	46	0.756	GT061	28	0.161
G888	50				
GT041 组码为GT026	30	0.692	GT062	25	0.340
G187	35			25	
GT042 第码为GT026	20	0.443	GT063	2	0.209
G789	35				

线密度仅供参考,出货以实际磅重为准! 212

太阳能系列 Solar energy series

HD太阳能系列型材图

新图号	简图	线密度
旧图号	间	kg/m
GT064	N 3 W	0.394
GT068	18	0.497
GT069	8.5	0.613
GT070 角码为 GT050	8 25	0.312
GT071	12.5	0.687
GT072	12.5	0.378

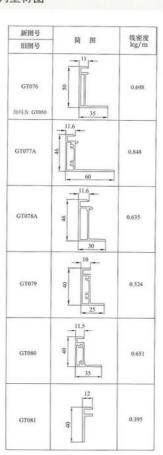


213 线密度仅供参考,出货以实际磅重为准!

HD太阳能系列型材图

国家免检

新图号	简图	线密度
旧图号	1150 150	线密度 kg/m
GT082	7.3	0.245
GT083	7.3	0.267
GT084	35	0.519
GT085	8	0.646
GT086	11.5	0,674
GT087	11.6	0.655

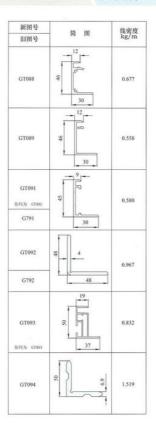

Applications:

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



⇒HENTEC Hentec Industry Co.,Ltd



+86-13861643436



aluminum@hentec.com.cn



aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421