

Anodized Aluminum 6063 T5 Solar Panel Frame With L Connector , 45 \times 35mm

- Basic Information
- Place of Origin:
- Brand Name:
- Certification:
- Minimum Order Quantity:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:





Product Specification

• Product Name:	Aluminum Solar Panel Frame
• Alloy:	6063,6061,6005
 Material: 	Aluminum
Suface Treatment:	Mill Finished, Anodized , Electrophoretic Coated, Powder Spray Coated
Deep Process:	Milling, Drilling, Bending, Cutting
• Temper:	T4, T5, T6 ,T66
Highlight:	aluminium solar panel frame, solar panel aluminum frame

China



More Images



Product Description

Anodized Aluminum 6063 T5 Solar Panel Frame With L Connector , 45 × 35mm

- 1.Alloy :6063,6061,6005 or according to customer's choice
- 2.Material:Aluminum
- 3.Suface Treatment: Mill Finished, Anodized , Electrophoretic coated, Powder spray coated, Fluorocarbon powder spray coated /PVDF Paint, Drawbench, Steel polished, Wood grain coated /Wooden transfer .
- 4.Deep process: Milling, Drilling, Bending,Cutting.
- 5.Application: Aluminum solar frame is widely used as the frame of solar panel.

6.Color:clear, satin, bronze, black, golden, silver, other multicolor 7.Temper: T4, T5, T6 ,T66

Description:

Aluminum Extrusion Solar Panel Frame

Aluminum solar frame is widely used as the frame of solar panel, and then it is also called as aluminum solar panel frame. Our aluminum solar frames adopt L connector or screw joint, resulting in well fixed structure with durability. They are of high quality and at low price.

Features:

1) 30*25 suitable for 30-120W solar modules 2) 35*35 suitable for 80-180W solar modules 3) 50*35 suitable for 160-220W solar modules

4) Many other custom made sizes available, such as: 45*35mm, 60*35mm, 46*40mm, 46*50mm, etc.

Specifications :

Aluminum Extrusion Solar Panel Frame
Alloy 6063, 6061 or according to customer's choice
T3, T4, T5, T6
Anodize (clear, satin, bronze, black, golden, silver, other multicolor) , electrophoresis, powder coating, PVDF coating, wood grain painting, etc.
Any color based on Standard Germany RAL Mark
1 ton. Usually 12 tons for a 20 feet container; 24 tons for a 40 feet container.
used as the frame of solar panel
1. Milling; 2. Drilling; 3. Bending; 4. Cutting.
1. Using our moulds, free; 2. Using customer's drawing, opening mould fee need to be paid.
25*25, 35*35,30*46, 46*50, 30*25, 40*40 ,50*35,etc.We can provide
customized aluminum solar frames upon to customers' request.
Shanghai, etc.

太阳能系列 HD太阳能系列型材图

新图号	Ant: 1941	绳家市	新图号	the sec	AD SAC IN	
旧图号	简图	线密度 kg/m	旧图号	简图	线密度 kg/m	
GT001	45.1	0.987	GT607	80 S	0.803	
G701	45.1		G007	30		
GT002 角码为GT001	*	0.530	GT008	69 20 20 20 20 20 20 20 20 20 20 20 20 20	0.633	
G702	35		G008			
GT003	¥	0.615	GT009	38 1 2 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	0.494	
G795	25		G009	25		
GT004	8.5 \$	0.466	GT010		0.496	
G794	16		G010			
GT005	46 0 11.6	0.814	GT011	9	0.388	
G590	50		G011	Ļ		
GT006	4	0.681	GT012		0.290	
G591	40		G012			

209 线密度仅供参考,出货以实际磅重为准!

HD太阳能系列型材图 国家免检

新图号	440 000	线密度	新图号	44. 111	线密度
旧图号	简图	kg/m	旧图号	简图	kg/m
GT013	0.372	GT019	00	0.665	
G778	17		G599	35	
GT014	***	0.367	GT020	12 9	0.400
G594	25		G846	Ļ	
GT015		0.183	GT021	¥	0.884
G595			Z081	1 U.	
GT016	8	0.248	GT022	57.5 11.6	1.228
G596			Z082	50	
GT017	SE 30	0.534	GT023	9 5 0.	
G597			Z083	67	
GT018	11.5	0.339	GT024	31.5 11.6	1.073
G598			Z084	50	

线密度仅供参考,出货以实际磅重为准! 210

太阳能系列 Solar energy series HD太阳能系列型材图

新图号	Art. 144	线密度	新图号		线密度
旧图号	简图	kg/m	伊图号	简图	kg/m
GT025 角码为GT026	8.5 	0.653	GT031	35	0.548
G895	38		G893	30	
GT026	40.2	0.732	GT032	7.6 SE	0.279
G896	40.2		G894		
GT027 角码为GT026		0.424	GT033	46,4	1.711
G915	28		G913	46.4	
GT028 角码为GT026	***	0.524	GT034 角码为GT033	05	0.745
G916	35		G914	35	
GT029	L L	1,300	GT035	05	0.398
G822	42		G222		
GT030 角码为GT029		0.567	GT036	11.5 05	0.754
G823	35		G224	35	

211 线密度仅供参考,出货以实际磅重为准!


		HD	、阳能系列	型材图	国家免
新图号	简图	线密度	新图号	简图	线索的
旧图号	[H] [2]	线密度 kg/m	旧图号	简图	线密度 kg/m
GT037	52	0.172	GT052	4	0.728
G229				1	
GT038	22 S	0.374	GT054	8	0.509
G230	25		角码为 GT052	35	
GT039	9	0.626	GT055	****	0.537
G889	30		角码为GT052	35	
GT040	11.5	0.756	GT061	25	0.161
G888	50				
GT041 0码为GT026	05	0.692	GT062	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	0.340
G187	35			25	
GT042 1日3为GT026	211 201	0.443	GT063		0.209

线密度仅供参考,出货以实际磅重为准! 212

太阳能系列 Solar energy series HD太阳能系列型材图

新图号	简图	线密度	新图号		All she at
旧图号	181 [01	kg/m	旧图号	简图	线密度 kg/m
GT064	27 <u>2</u> <u>0</u> <u>0</u>	0.394	GT076 狗母为 GT050	8	0.698
GT068		0.497	GT077A ¥	11.6 2 5 60	0.848
GT069	8.5 10 25	0.613	GT078A	÷	0.635
GT070 角码为 GT050	S2 25	0.312	GT079	₽ ₽ ₽ ₽ ₽ ₽	0.524
GT071		0.687	GT080	9 03 35	0.651
GT072	12.5	0.378	GT081	9	0.395

213 线密度仅供参考,出货以实际磅重为准!

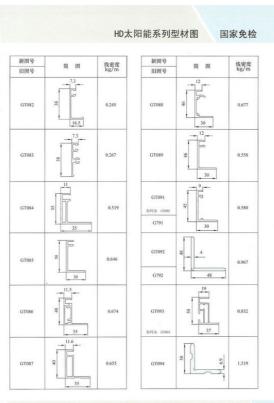

线密度仅供参考,出货以实际磅重为准! 214

Applications:

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



HENTEC Hentec Industry Co.,Ltd

+86-13861643436 Saluminum@hentec.com.cn aluminumextrusion-profiles.com Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421