

35 \times 35 mm Aluminum Solar Panel Frame , Mill Finished Aluminum 6005 Frame

Basic Information

- Place of Origin:
- Brand Name:
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Packed with EP ,Carton ,Pallet or wooden
 - case
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 3000tons each month



Product Specification

- Product Name:
- Alloy:
- Material:
- Suface Treatment:
- Deep Process:
- Temper:
- Highlight:

| Aluminum Solar Panel Frame |
|----------------------------|
| 6063,6061,6005 |

Aluminum

China HT

- Mill Finished, Anodized, Electrophoretic Coated, Powder Spray Coated
 - Milling, Drilling, Bending, Cutting
 - T4, T5, T6 ,T66
 - aluminium solar panel frame, solar panel aluminum frame



More Images



Product Description

35 x 35mm Aluminum Solar Panel Frame , Mill Finished Aluminum 6005 Frame

- 1.Alloy :6063,6061,6005 or according to customer's choice
- 2.Material:Aluminum
- 3.Suface Treatment: Mill Finished, Anodized , Electrophoretic coated, Powder spray coated
- 4.Deep process: Milling, Drilling, Bending, Cutting.

Description:

Aluminum Extrusion Solar Panel Frame

Aluminum solar frame is widely used as the frame of solar panel, and then it is also called as aluminum solar panel frame. Our aluminum solar frames adopt L connector or screw joint, resulting in well fixed structure with durability. They are of high quality and at low price.



Features:

- 1) 30*25 suitable for 30-120W solar modules
- 2) 35*35 suitable for 80-180W solar modules
- 3) 50*35 suitable for 160-220W solar modules
- 4) Many other custom made sizes available, such as: 45*35mm, 60*35mm, 46*40mm, 46*50mm, etc.



Specifications :

| ltem | Aluminum Extrusion Solar Panel Frame |
|--------------|---|
| Material | Alloy 6063, 6061 or according to customer's choice |
| Temper | T3, T4, T5, T6 |
| Surface | Anodize (clear, satin, bronze, black, golden, silver, other multicolor) , electrophoresis, powder coating, PVDF coating, wood grain painting, etc. |
| Color | Any color based on Standard Germany RAL Mark |
| MOQ | 1 ton. Usually 12 tons for a 20 feet container; 24 tons for a 40 feet container. |
| Profile type | used as the frame of solar panel |
| Fabrication | 1. Milling; 2. Drilling; 3. Bending; 4. Cutting. |
| Moulding | 1. Using our moulds, free; 2. Using customer' s drawing, opening mould fee need to be paid. |

```
太阳能系列
```

HD太阳能系列型材图

| 新图号 | 44- 124 | 线密度 | 新图号 | the int | 线密度 |
|-------------------|------------|-------|-------|----------------------|-------------|
| 旧图号 | 简图 | kg/m | 旧图号 | 简图 | 线街段 kg/m |
| GT001 | 45.1 | 0.987 | GT607 | 20 | 0,803 |
| G701 | 45.1 4 | | G007 | 30 | |
| GT002 角码为GT001 | | 0.530 | GT008 | ₹ 25 | 0.633 |
| G702 | | | G008 | | |
| GT003 | 8-5 8-5 | 0.615 | GT009 | 38 78 78 78 | 0.494 |
| G795 | 25 | | G009 | 25 | |
| GT004 | 8.5 | 0.466 | GT010 | 02 | 0.496 |
| G794 | 16 | | G010 | | |
| GT005 | 94 | 0.814 | GT011 | 6 | 0.388 |
| G590 | 50 | | G011 | Ļ | |
| GT006 | 99 | 0.681 | GT012 | 28 | 0.290 |
| G591 | 40 | | G012 | , | |

HD太阳能系列型材图 国家免检

| 新图号 | 简图 | 线密度 | 新图号 | 简图 | 线密心 |
|-------|--|-------------|-------|-------------------|-------------|
| 旧图号 | [0] [2] | 线密度 kg/m | 旧图号 | 间图 | 线密度 kg/m |
| GT013 | 40 | 0.372 | GT019 | 11.5 00 | 0.665 |
| G778 | 1 | | G599 | 35 | |
| GT014 | 52 JS | 0.367 | GT020 | 07 | 0.400 |
| G594 | 25 | | G846 | | |
| GT015 | 32 | 0.183 | GT021 | 11.6 \$ | 0.884 |
| G595 | | | Z081 | <u>† 11</u> 60 | |
| GT016 | SE S | 0.248 | GT022 | 57.5 10 | 1.228 |
| G596 | | | Z082 | 50 | |
| GT017 | 23 N | 0.534 | GT023 | 94 | 0.952 |
| G597 | 30 | | Z083 | 67 | |
| GT018 | 00 | 0.339 | GT024 | <u>57.5</u> | 1.073 |
| G598 | | | Z084 | 50 | |

太阳能系列

HD太阳能系列型材图

| 新图号 | 简图 | 线密度 | 新图号 | Arts 1941 | र्था और संग |
|-------------------|------|-------|-------------------|------------|-------------|
| 旧图号 | 2.22 | kg/m | 日图号 | 简图 | 线密度 kg/m |
| GT025 角码为GT026 | 85 | 0.653 | GT031 | 7.6 55 | 0.548 |
| G895 | 38 | | G893 | 30 | |
| GT026 | 40.2 | 40.2 | GT032 | 7.6 S | 0.279 |
| G896 | | | G894 | | |
| GT027 角码为GT026 | 85 | 0.424 | GT033 | 464 | 1.711 |
| G915 | 28 | | G913 | 46.4 | |
| GT028 角码为GT026 | 8.5 | 0.524 | GT034 角弱为GT033 | e, 12 | 0.745 |
| G916 | 35 | | G914 | 35 | |
| GT029 | 42 | 1:300 | GT035 | 05 | 0.398 |
| G822 | 42 | | G222 | Ļ | |
| GT030 角码为GT029 | 33 | 0.567 | GT036 | 11.5 05 | 0.754 |
| G823 | 35 | | G224 | 35 | |


HD太阳能系列型材图


国家免检

新图号 新图号 线密度 kg/m 线密度 kg/m 简图 简图 旧图号 旧图号 40.2 GT037 _ 0.172 GT052 0.728 4 G229 11 GT038 GT054 0.509 0.374 30 角码为GT052 G230 35 11.5 GT039 GT055 0.537 0.626 35 30 角码为GT052 G889 35 8 11.5 -GT040 0.756 0.161 GT061 25 50 G888 8 GT041 S 角码为GT026 0.692 GT062 25 0.340 2 ŧ. 35 G187 25 9 .11 GT042 -角码为GT026 0.443 GT063 0.209 5 92 35 G789

太阳能系列

HD太阳能系列型材图

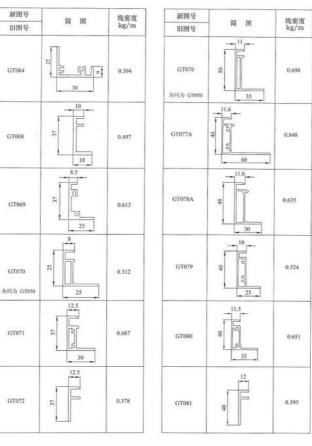

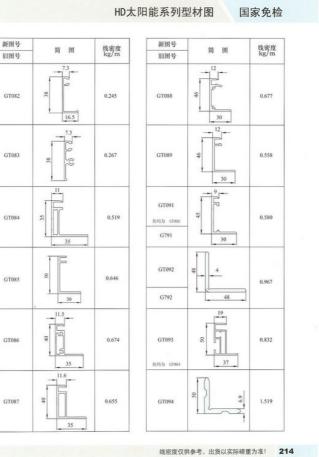

Applications:

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



