6060 - T5 Solar Roof Mounting Systems With Large Span

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: HT
- Certification: CA , CE
- Application: buildings,commercial,industrial
- Temper: T4, T5, T6 ,T66
- Suface Treatment: Mill Finished,Anodized etc
- Material: Aluminum
- Alloy : 6063,6061,6005
- Product Name: Aluminum Curtain Wall Profile
- Minimum Order Quantity: 100SET

Product Specification

- Highlight: **solar panel roof mounts**, **aluminum frames for solar panels**

for more products please visit us on aluminumextrusion-profiles.com

Our Product Introduction

for more products please visit us on aluminumextrusion-profiles.com

Product Description

6060 - T5 Solar Roof Mounting Systems With Large Span

1.Alloy :6063,6061,6005 or according to customer' s choice
2.Material:Aluminum
3.Suface Treatment: Mill Finished,Anodized ,Electrophoretic coated,Powder spray coated,Fluorocarbon powder spray coated /PVDF Paint, Drawbench,Steel polished,Wood grain coated /Wooden transfer .
4.Deep process: Milling, Drilling, Bending,Cutting.
5.Color:clear, satin, bronze, black, golden, silver, other multicolor
6.Temper: T4, T5, T6 ,T66

Description:

Hentec Solar roof mounting systems refers to a solar panel mounting system suitable for both flat roofs and sloping roofs. With unique aluminum alloy rails, Z-type clamps, and special rail connection techniques, etc, there is no need for on-site processing anymore. Thus, solar panel installation becomes simple and easy.
To suit needs for different kinds of hooks. Hentec solar roof mounting system comes with different kinds of hooks. For instance, we have stainless steel hooks for tile roofs, L-type hooks for steel plate roofs and inclined standing lets for flat roofs.

Applications:

1. Hentec solar roof mounting system is convenient and easy to use.
2. Its components come with flexible combination and good compatibility.
3. Large span.
4. According to customer's demands, the mounting bracket can parallel to the roof or for an angle between the roof.
5. We can provide customized solar roof mounting system according to customers' requirements.

Specifications:

Material: 6060-T5 aluminum alloy
Surface treatment methods: silver anodized
Installation site: flat or sloping roofs
Roof material: tile in majority
Installation angle: max.60 degree
Installation height: max .20m
Wind resistance: 60m/s
Snow load: 1.4KN each square meter
Solar panel type: frameless or framed
Assembly method: longitudinal or lateral
Solar panel size: The solar roof mounting system is suitable for all types of solar panel .
International standard: AS/NZS1170 ,and more
Supporting rails: aluminum alloy extrusions
Color: natural color
Warranty: 10years

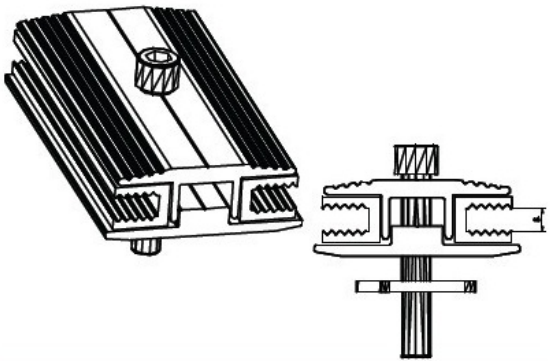

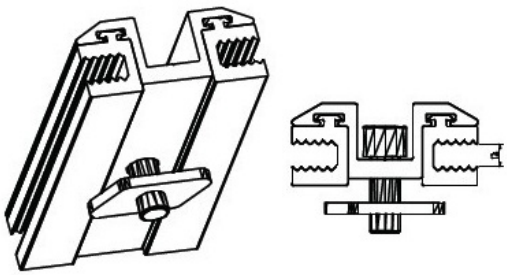

挂勾

Hook

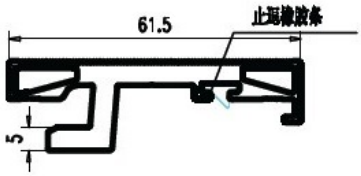

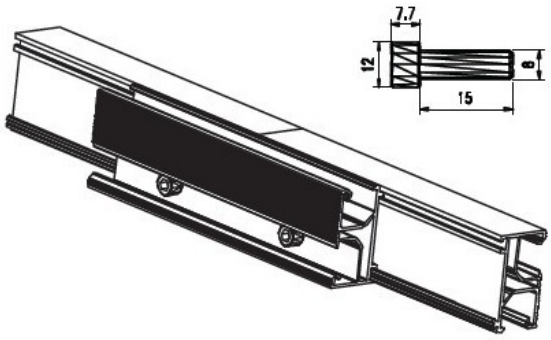

导轨

Rail



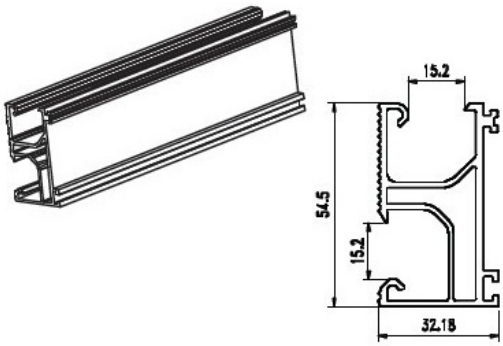





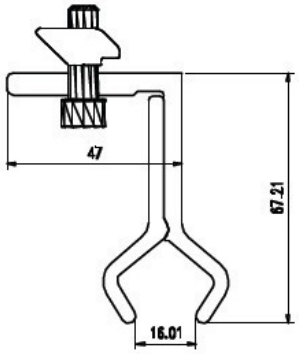

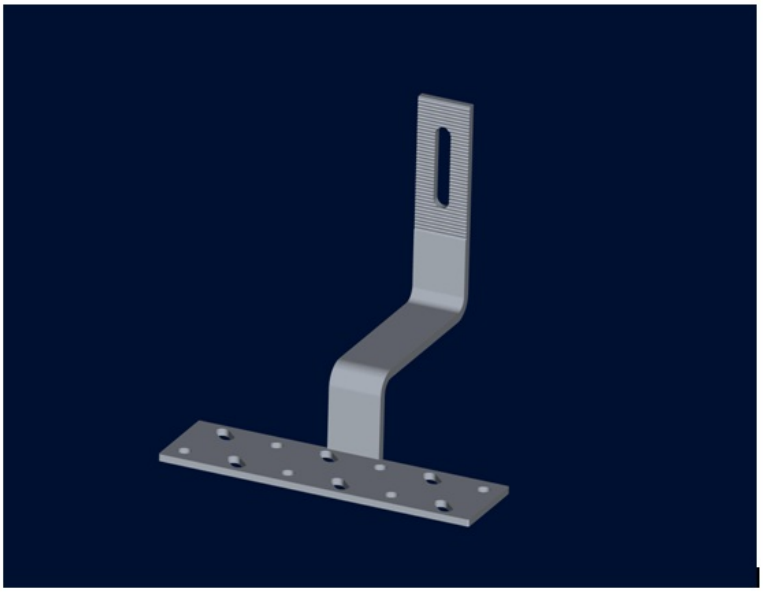

L支脚及弯勾

L foot and bend hook

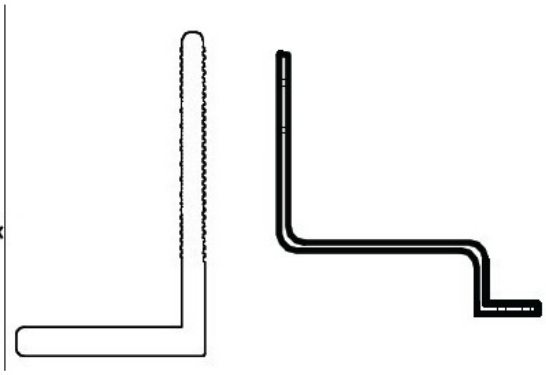

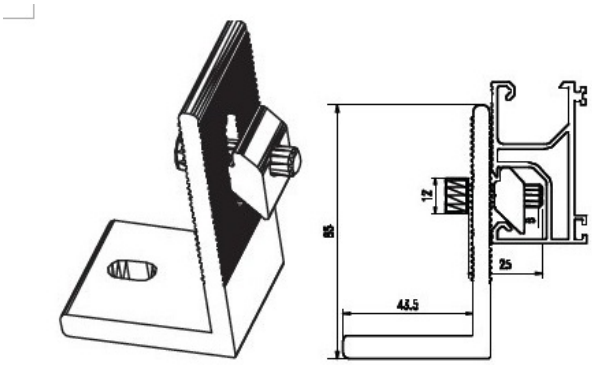
85
12
25
43.5

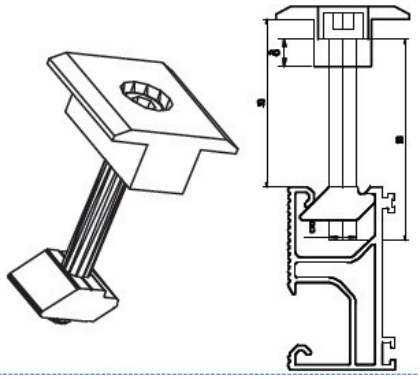
8
n
n

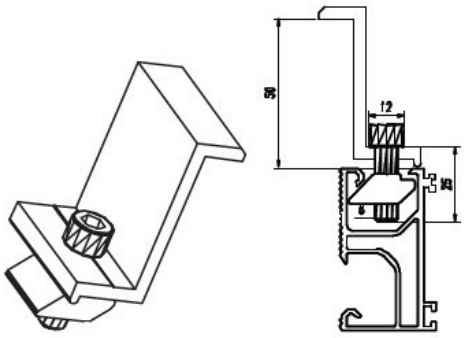
50
12
25

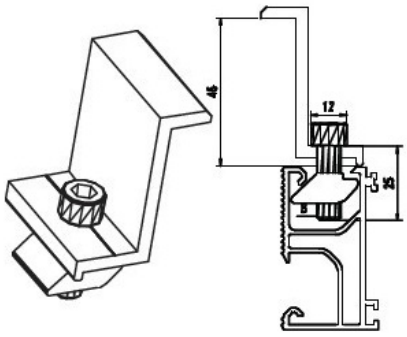
45
12
25

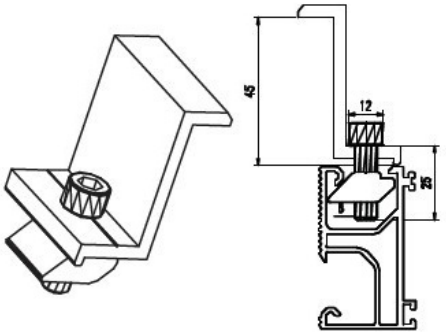
45
12
25

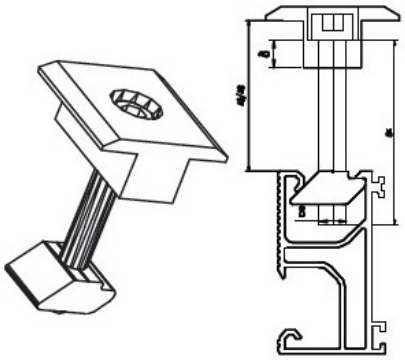

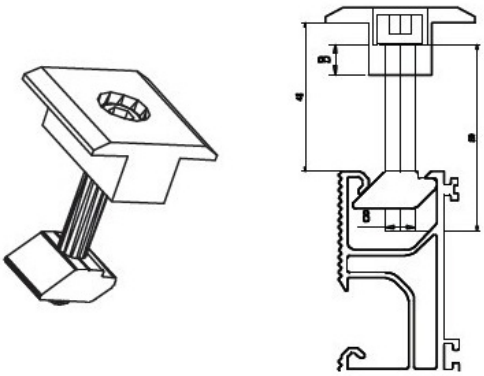

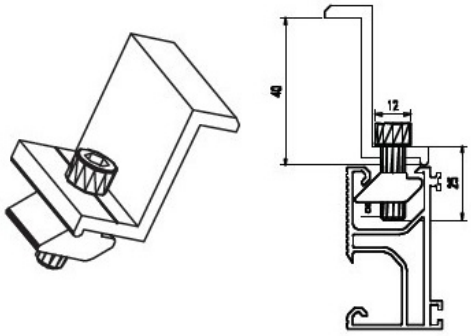
40
12
25

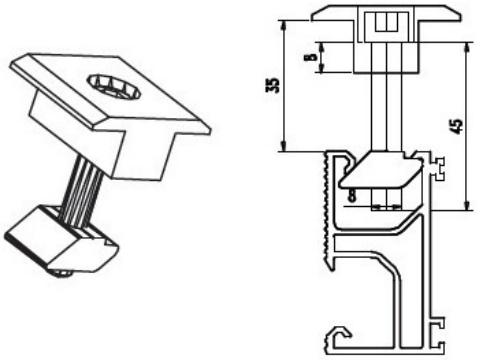
35
45

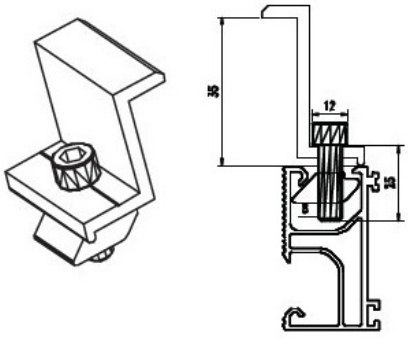
35
12
25

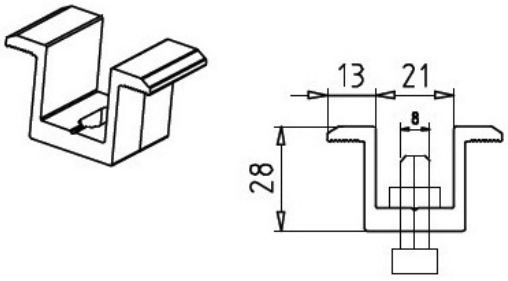
13
21
8
28

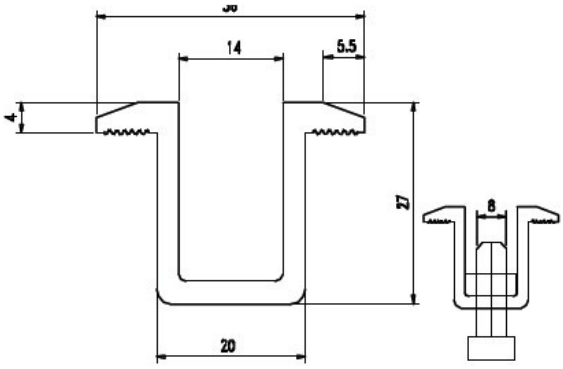
14
5.5
4
27
8
20

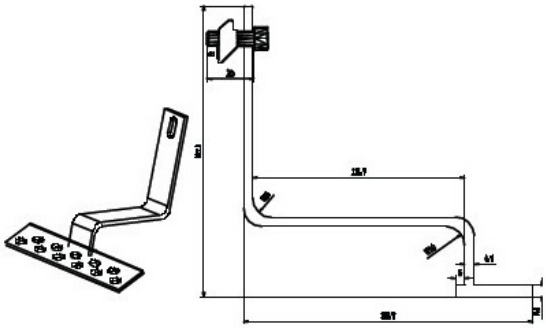

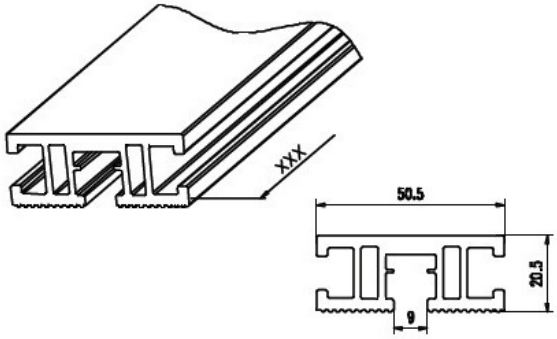
XXX
50.5
20.5
9

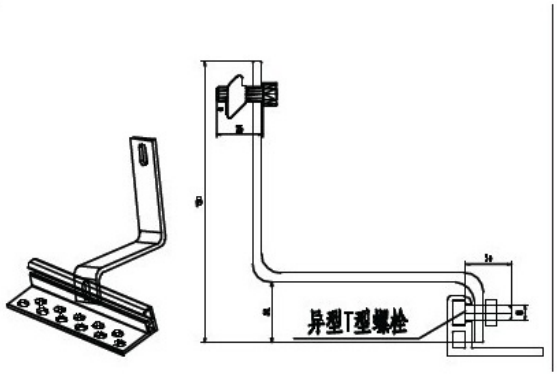
异型T型螺栓

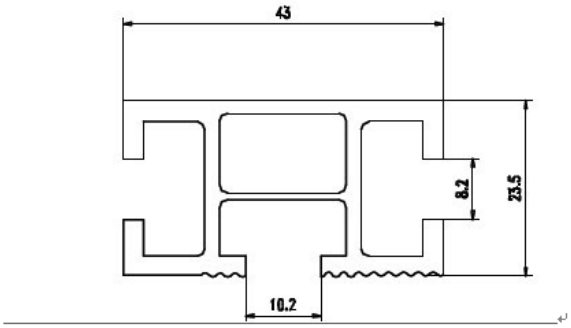

HENTEC Hentec Industry Co.,Ltd

+86-13861643436 aluminum@hentec.com.cn aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421