

Audio Anodized Radiator Aluminum Heatsink Extrusion

Basic Information

- Place of Origin: China
- Brand Name: HENTEC
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month



Product Specification

- Product Name: Aluminum Heatsink Extrusion Profiles
- Alloy: 6063,6061,6005
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T4, T5, T6 ,T66
- Highlight: **radiator aluminum heatsink extrusion, audio aluminum heatsink extrusion, anodized aluminum heatsink extrusion**



Product Description

Anodized Radiator Aluminium Heatsink Extrusion , Extruded Heat Sink Profiles For Audio

Our Advantages:

1. 17+ years experience in providing ONE-STOP customized aluminium extrusion and machining solution; 11+ years of exporting to 40+ countries;
2. 100% new material
3. Competitive prices with short lead-time for both tooling and parts, because we do everything in-house
4. Effective and strong technical support (30+ engineers) and excellent sales services .
5. Sufficient production capacity (44extrusion lines; 3+ CNC machines).
6. Efficient communication (48-hour quote lead time).

Quality Control: We operate the most strict quality system,the detection is from the material,production process to final product,and ensure the product quality.

Process: Die design--Die making--Smelting and alloying--Quality control--Extruding--Cutting--Heat treatment--Surface treatment--Welding--Packing

Packing: Packed with plastic film, then wrap by craft paper or EPE film.

Technology Supports

1. Engineering Design.
2. Quality Standard: China GB, according to the Drawing and the Customer's Details.

Specifications:


1. Primary Technical Data

1) Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2) Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

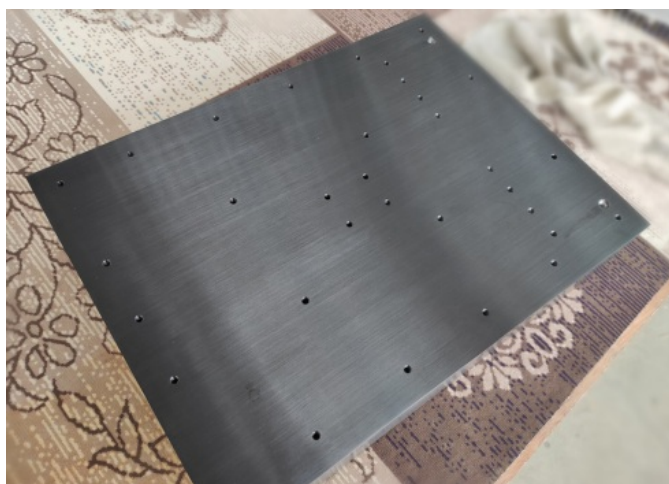

Competitive Advantage:

We can offer professional Manufacturing and exporting service, OEM/ODM for Metal & Plastic parts in China. All the parts manufactured by CNC Lathe & Milling Machine Center.




Tag :

LED Aluminum Heat Sink

extruded aluminum heat sink

 **HENTEC** Hentec Industry Co.,Ltd

 +86-13861643436

 aluminum@hentec.com.cn

 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421