

CA T Slot 6063 Custom Aluminum Extrusions For Assembly Line

Basic Information

- Place of Origin:
- Certification:
- CA ,CE ,ISO14001:2004, ISO9001:2000
- Minimum Order Quantity:
- · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- 1 ton Ep paper ,kraft ,pallet
- 20days

China

T/T ,L/C





Product Specification

- Product Name:
- Alloy:
- Material:
- Suface Treatment:
- Deep Process:
- Temper:
- Highlight:

Industrial Aluminium Profile

6063,6061,6005

Aluminum


- Anodized Powder Coated, Drawbench, Steel Polished
- Milling, Drilling, Cutting
- T5, T6
- ca custom aluminum extrusions, 6063 custom aluminum extrusions, 6063 extruded aluminum t slot



T - Slot Industrial Aluminum Extrusion Profile / Aluminum Profile For Assembly Line

T-slot Industrial Aluminium profile are mainly producted by Alloy 6061-T5/T6 or 6063-T5/T6, it is widely used for aluminium display and exhibitionshelf, aluminium coveyors system, work bench, machine frames and stairway - platform - system, transportation, construction and so on.

Material	6061, 6063, 6005, 6060, 6082 etc
Temper	T4 ,T5, T6 , T66
Surface treatment	Mill Finish, Anodized, Eletropharesis, Powder Coated, Paiting, Polish, Sandblasting, brushed
Length	Customized
Shape	Round,Square,Rectangle,Triangle,Hexagon,Octagon,Oval,or as per the drawings and samples
Deep Process	cutting,drilling,punching,milling,deburring,clearing,tapping etc
Wall Thickness	> 0.3mm
Section size	≤ Ø650mm
Package	inner plastic paper interleaving each tube,outer fixed by plywood or pallets,or as required
Delivery time	15-25 days after deposit
Certification	ISO9001, ISO14001

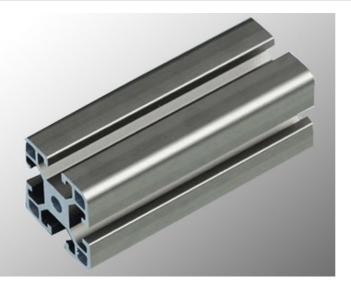

Applications:

Industry Aluminum profile used in cars, trains machinery ,electronics, medical and other industrial filed . In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.





Specifications:

1. Primary Technical Data

1)Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2)Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥8%
00000	Т6	≥ 205Mpa	≥ 180Mpa	≥8%
6061	Т6	≥ 265Mpa	≥ 245Mpa	≥8%

公司图号	1 1 H	载密度 kg/m	公司图号	第三	线密度 kg/m
HT-745		1.292	HT-752		1.646
HT-746	30 78 78 10.2	0.786	HT-753	80 80 8.2 10.2	2.952
HT-747	50 50 50 50 50 50 50 50 50 50 50 50 50 5	2.524	HT-754		2.015
HT-749	22	0.464	HT-767		1.522
HT-750	7.2 40 6.2 000 9	0.808			
HT-751		1.616			

Competitive Advantage:

1) Engineering design and support.

Aluminum profiles deeply processing:cutting,punching,drilling,milling,and fabricating.
High Quality system, strictly inspection during production and whole inspection before package.
Good performance, product warranty for 15 years.



HENTEC Hentec Industry Co.,Ltd

C +86-13861643436 aluminum@hentec.com.cn @ aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421