



T6 Temper Aluminium Profile System 40X40 Slot Anodized Milling Bending Cutting

Our Product Introduction

for more products please visit us on aluminumextrusion-profiles.com

Basic Information

- Place of Origin: China
- Brand Name: MetalPlus
- Certification: ISO14001:2004, ISO9001:2000
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month



Product Specification

- Product Name: Aluminum Profile System
- Alloy: 6063 6061
- Material: Aluminium
- Surface Treatment: Anodized
- Deep Process: Milling, Drilling, Bending, Cutting
- Temper: T5, T6
- Highlight: **T6 Temper Aluminium Profile System, Anodized Milling Aluminium Profile System, Bending Cutting Aluminium Profile Framing Systems**



Product Description

Customized Aluminium Profile System / 40X40 Slot Industrial Aluminium Profile Framing Systems


- (1).Suitable for industry,architecture,transportation and so on.
- (2).20 years warranty.
- (3).High corrosion resistance.
- (4).5-10 years weather resistance.
- (5).Good wear resistance & anti-scratch.
- (6).Size customized.

Product Name	Industrial aluminium profile
Material	Aluminium alloy 6063,6061,6082,6060,6005
Temper	T4 T5 T6 T66
Surface	Mill finish, Sandblasting ,Anodizing, powder coated, electrophoresis, Brushing , PVDF coating, wood grain painting, polishing
Size	20 30 45 80 90 series
Slot width	6MM,8MM
Length	Customized
Appearance	Normally square,round and T-shaped, V-shaped or customized
Color	Silver,black,blue,wood color,according to clients' requirements.



Applications:

Industry Aluminum profile used in cars, trains machinery ,electronics, medical and other industrial filed . In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.

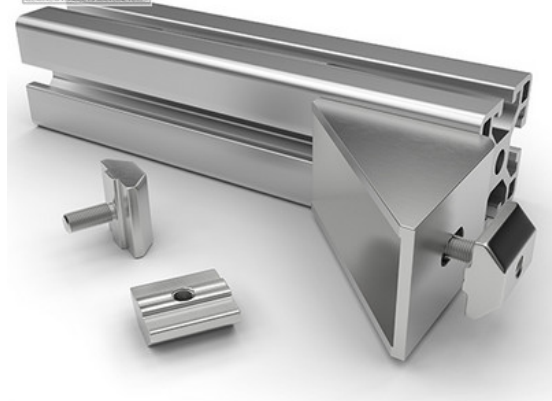

Specifications:

1.Primary Technical Data

1)Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2)Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

公司图号	图 样	线密度 kg/m	公司图号	图 样	线密度 kg/m
HT-745		1.292	HT-752		1.646
HT-746		0.786	HT-753		2.952
HT-747		2.524	HT-754		2.015
HT-749		0.464	HT-767		1.522
HT-750		0.808			
HT-751		1.616			

Competitive Advantage:

- 1)Engineering design and support.
- 2)Aluminum profiles deeply processing:cutting,punching,drilling,milling,and fabricating.
- 3)High Quality system, strictly inspection during production and whole inspection before package.
- 4)Good performance, product warranty for 15 years.



 **HENTEC** Hentec Industry Co.,Ltd

 +86-13861643436

 aluminum@hentec.com.cn

 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421