




Clear Alodined Aluminum Heatsink Extrusion Profiles 6063-T5 For Industry

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: HT
- Certification: CA ,CE
- Model Number: KTH-007
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month

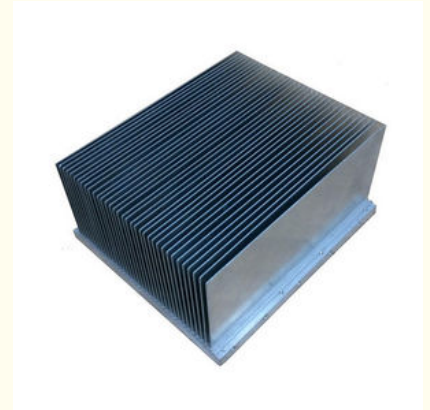

Product Specification

- Highlight: heatsink extrusion profiles,
aluminium heatsink extrusion

Product Description

Clear Alodined Aluminum Heatsink Extrusion Profiles 6063-T5 For Industry

Material:Aluminum

Temper: T4, T5, T6 ,T66

Alloy:6063,6061,6005 or according to customer' s choice

Color:clear, satin, bronze, black, golden, silver, other multicolor

Description:

Item	Clear Alodined Aluminum Heatsink Extrusion Profiles 6063-T5 For Industry
Material	Alloy 6063, 6061,6005,6060 or according to customer' s choice
Temper	T3, T4, T5, T6
Surface	Anodize (clear, satin, bronze, black, golden, silver, other multicolor) , electrophoresis, powder coating, PVDF coating, wood grain painting, etc.
MOQ	1 ton. Usually 12 tons for a 20 feet container; 24 tons for a 40 feet container.
Profile type	Aluminum Extrusion Heatsink which is used in medical equipment ,LED Heat sink ,CPU Cooler , Led Lamp ,Led light , notebook cooler ,and some other filed .
Moulding	1. Using our mould, free; 2. Using customer' s drawing, opening mould fee need to be paid .
Standard	Meet the China national standard GB/T6892-2006 and Europe standard EN12020-1,2(2001) and American standard AAMA611-98.

Applications:

Industry Aluminum profile used in cars, trains machinery ,electronics, medical and other industrial filed . In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.

Specifications:


1.Primary Technical Data

1)Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2)Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

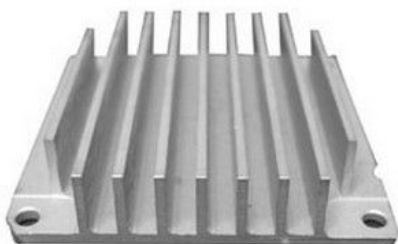

2.Specifications:

Excellent material for smooth and subtle edges

Elegant appearance

Surface treatment: colorful anodized or electrostatic powder coated

Suitable for constructions and other industrial purposes

Customized surface finishes are welcome

Competitive Advantage:

- 1)Engineering design and support.
- 2)Aluminum profiles deeply processing:cutting,punching,drilling,milling,and fabricating.
- 3)High Quality system, strictly inspection during production and whole inspection before package.
- 4)Good performance, product warranty for 15 years.



+86-13861643436



aluminum@hentec.com.cn



aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421