Anodized Aluminium Window Extrusions Profiles With Terminal Strip

Basic Information

. Place of Origin: China HENTEC . Brand Name: CA,CE · Certification: Minimum Order Quantity: 1 ton

Packaging Details: EP Paper ,kraft and pallet

Delivery Time: 20days • Payment Terms: T/T or L/C

• Supply Ability: 100 000 ton each month



Product Specification

Material: Aluminum Alloy

• Temper: T5 / T6

6063 / 6061 / 6060 • Alloy: Powder Painted · Surface: · Color: Customerized

Standard: EN755, ASTMB221, DIN Standard

. Highlight: **Anodized Aluminium Window Extrusions, Aluminium Window Extrusions With Terminal**

, Aluminum Alloy Window Extrusions Profiles



More Images



Product Description

Anodized Aluminium Window Extrusions With Termal Strip , Customerized

Our company MetalPlus (Hentec Factory) is a manufacturer which has more than 17 years experience in producing industrial and household aluminum profiles. It is located in Wuxi, China.

It has a team of experienced technical staff and efficient managerial staff. It is also equipped with quality control equipments to ensure first-class products to be produced. The whole production process includes: aluminum ingot casting, extrusion mold design & making, extruding, aging treatment, surface treatment.

Descrition:


- 1. Window and Door Aluminum profile for European market
- 2. Simple and easy for instanllation.
- 3. Surface Finish: Anodized, Powder Coating or as your requested
- 4. Good wear and corrosion resistance
- 5. Smoothness, attractive and elegant looking to meet your perferences.
- 6. We previde One Package Service: Extruding, Milling, Drilling, Precise Cutting, Special surface treatment and packing, etc

1	Business type	Manufacturer
2	Standard:	GB 5237-2008
3	Product series	Aluminum profile for building material and industrial material
4	Price	Based on Aluminum Ingot price + processing Fee
5	Payment term	T/T, L/C at sight
6	Surface treatment	Anodizing, Powder coating, electrophoresis, wooden finish
7	Specification	A. Alloy: 6063, 6060, 6061, 6005
		B. State: T5/T6
		C. Length: 1m-7m
		D. Normal Anodizing thickness: 8-12 micro
		E. Normal powder coating thickness: 60-100 micro
		F. Tensile strength: ≥ 16 mpa
		G. Yield strength: ≥ 110 mpa
		H. Extensibility: ≥ 8%
		I. Hardness(HW): ≥ 8
8	Packing	Kraft paper, EPE Fram, Shrink film, Composite paper
9	MOQ	1ton
10	Delivery time	15-30 days if the mold is ready



Window and Door's Design

We can DIY any type of aluminium windows and doors as your request, and our popular types are as below:

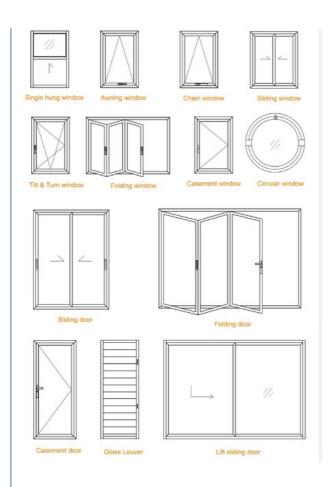

Competitive Advantage:

- 1. Profession production workshop for extrusion and colored profile manufacturing, including we own 4000 tons extrusion machine, automatic vertical electrophoresis production lines.
- 2. Strict quality control and inspection before good delivery.
- 3. Production standards: GB5237-2008 or other International standards
- 4. With 17 years' experience, our factory is well recognized by clients and enjoys a good reputation, among overseas markets.
- 5. Provincial-level R&D team .



+86-13861643436

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421

