

## Solar Panel Mounting Aluminum Rail Industrial Profile Anodized

Our Product Introduction

for more products please visit us on [aluminumextrusion-profiles.com](http://aluminumextrusion-profiles.com)


### Basic Information

- Place of Origin: China
- Certification: CA ,CE ,ISO14001:2004, ISO9001:2000
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month



### Product Specification

- Product Name: Industrial Aluminium Profile
- Alloy: 6063 ,6005,6060
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated, Drawbench,Steel Polished
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T5, T6
- Highlight: **Solar Panel Mounting Aluminum Rail,  
6063 Aluminum Profile Rail,  
26\*52mm Aluminum Profile Rail**

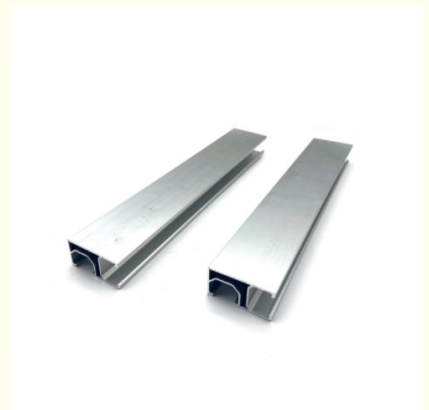

## Product Description

### Anodized Industrial Aluminum Profile / Solar Panel Mounting Aluminum Rail

We can mould and manufacture the aluminum profiles as per customers' requirements.

#### Product Specification

Product Name	Aluminum Rail for solar mounting system
Brand Name	MetalPlus
Product Material	Aluminum
Surface Treatment	Anodized
Specification	26*52mm / 28*55mm / 27*55mm / 28*55mm / 28*57mm or other customized size Length: customized
Function	The Frame Support the Solar Panel
Include	Solar Bracket Rails, Fixture Guide Rail Integration, Solar End Clamp, Solar Side Clamp, Plant, Bolt & Slider nut.
Feature	Anti-corrosion , safety and reliability, easy installation, long service life
Application	PV Solar Panel Installation
Certificate	ISO9001
Installation Site	Solar Mounting
OEM / ODM	Available

#### Applications:

Our aluminum profile has a wide range of application, like Radiator, Assembly line, Frame system, Machine Guards, Stairs & Platforms, Display rack, Automotive, Motor aluminium housing, Bridge system, Vessel, Elevator, etc.

#### Specifications:

##### 1. Primary Technical Data

###### 1)Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

###### 2) Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

公司图号	图 样	线密度 kg/m	公司图号	图 样	线密度 kg/m
HT-745		1.292	HT-752		1.646
HT-746		0.786	HT-753		2.952
HT-747		2.524	HT-754		2.015
HT-749		0.464	HT-767		1.522
HT-750		0.808			
HT-751		1.616			

#### Competitive Advantage:

- 1) Engineering design and support.
- 2) Aluminum profiles deeply processing: cutting, punching, drilling, milling, and fabricating.
- 3) High Quality system, strictly inspection during production and whole inspection before package.
- 4) Good performance, product warranty for 15 years.



