




## 6063 - T5 Aluminum Heatsink Extrusion Profiles Aluminum Extrusion Radiator

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: HT
- Certification: CA ,CE
- Model Number: KTH-007
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month

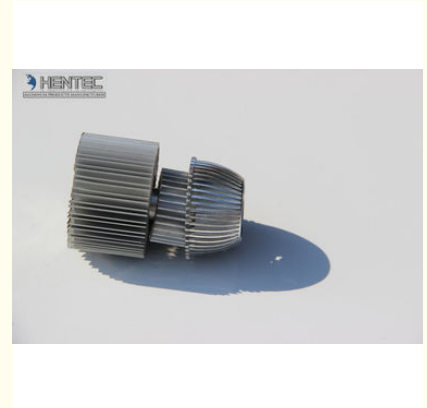

### Product Specification

- Product Name: Aluminum Heatsink Extrusion Profiles
- Alloy: 6063,6061,6005
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T4, T5, T6 ,T66
- Highlight: **heatsink extrusion profiles, aluminium heatsink extrusion**

for more products please visit us on [aluminumextrusion-profiles.com](http://aluminumextrusion-profiles.com)

## Product Description

### Description:

#### 6063 - T5 Aluminum Heatsink Extrusion Profiles , Aluminum Extrusion Radiator

We can supply kinds of aluminum heat sink with different kinds of material, specifications and surface treatments.

..

1. Material: 6063, 6061, 6005 etc.
2. surface treatment: anodizing, powder coating, polishing, mill finishing, sand blasting, wire drawing, wood color (timber turning) (as per customer requirements)
3. Procedure: preciously cutting, milling, drilling, punching, CNC machining, tapping, deburring, etc..

Customers'own detailed drawings or samples are welcome.

Any OEM is welcome.

### Order,payment,terms,shipment

- 1, Minimum order: 500 kg per trial order 1 piece of sample free of charge provided by approval and kept for future mass production.
- 2, Sample Lead Time: 25 working days(15 days for making the tool and 10 days making the samples. Before sending the samples to customer, samples should pass strict test in our lab. )Production Lead time: it depends on customers' order quantity ( 30 working days after deposit).
- 3, Payment :30% T/T in advance the balance after the copy of BOL .

### Applications:

Aluminum heat sink is widely used on Machines , cars , lighter ...

### Specifications:

#### 1. Primary Technical Data

##### 1) Chemical composition

| Alloy | Si      | Fe      | Cu       | Mn   | Mg       | Cr        | Zn   | Ti   | Impurity | Al   |
|-------|---------|---------|----------|------|----------|-----------|------|------|----------|------|
| 6063  | 0.2-0.6 | 0.35    | 0.1      | 0.1  | 0.45-0.9 | 0.1       | 0.1  | 0.1  | 0.15     | Rest |
| 6061  | 0.4-0.8 | 0.7     | 0.15-0.4 | 0.15 | 0.8-1.2  | 0.04-0.35 | 0.25 | 0.15 | 0.15     | Rest |
| 6060  | 0.3-0.6 | 0.1-0.3 | 0.1      | 0.1  | 0.35-0.6 | -         | 0.15 | 0.1  | 0.15     | Rest |
| 6005  | 0.6-0.9 | 0.35    | 0.1      | 0.1  | 0.40-0.6 | 0.1       | 0.1  | 0.1  | 0.15     | Rest |

##### 2) Mechanical property

| Alloy | Temper | Tensile strength | Yield strength | Elongation |
|-------|--------|------------------|----------------|------------|
| 6063  | T5     | ≥ 160Mpa         | ≥ 110Mpa       | ≥ 8%       |
|       | T6     | ≥ 205Mpa         | ≥ 180Mpa       | ≥ 8%       |
| 6061  | T6     | ≥ 265Mpa         | ≥ 245Mpa       | ≥ 8%       |



Hentec Industry Co.,Ltd

**Competitive Advantage:**

We can offer professional Manufacturing and exporting service, OEM/ODM for Metal & Plastic parts in China. All the precision metal parts manufactured by CNC Lathe & Milling Machine Center.



**HENTEC** Hentec Industry Co.,Ltd

+86-13861643436

aluminum@hentec.com.cn

aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421