

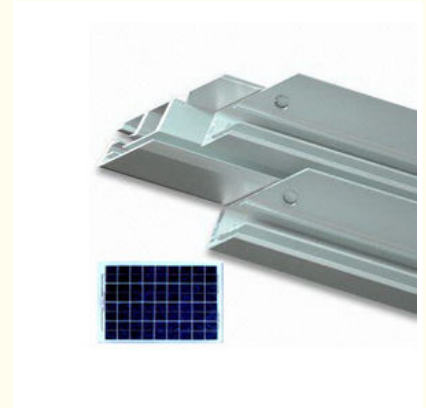


Silvery Anodized Aluminum Solar Panel Frame Clear Satin Bronze 35*35mm

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Hentec
- Certification: CA ,CE
- Model Number: HT858
- Minimum Order Quantity: 1 ton
- Packaging Details: Packed with EP ,Carton ,Pallet or wooden case
- Delivery Time: 25days
- Payment Terms: T/T ,L/C
- Supply Ability: 3000tons each month



Product Specification

- Material: Aluminum Alloy
- Temper: T5
- Color: Silvery
- Application: Roof
- Size: 35*35mm
- Surface: Anodized
- Highlight: aluminium solar panel frame,
anodized aluminum frame

for more products please visit us on aluminumextrusion-profiles.com

Product Description

Silvery Anodized Aluminum Solar Panel Frame , Aluminum Solar Border

- 1)temper:T3-T6
- 2)certificate:ISO9001:2008
- 3)surface treatment:anodize

Description:

Aluminum Extrusion Solar Panel Frame

Aluminum solar frame is widely used as the frame of solar panel, and then it is also called as aluminum solar panel frame. Our aluminum solar frames adopt L connector or screw joint, resulting in well fixed structure with durability. They are of high quality and at low price.

Features:

A) Specification:

- 1) 30*25mm suitable for 30-120W solar modules;
- 2)50*35mm suitable for 160-220W solar modules;
- 3) 35*35mm suitable for 80-180W solar modules;
- 4) many other custom made sizes available, such as 46*40mm, 46*50mm, etc.

B). Two types:

- 1) 90-angle
- 2) 45-angle

C). Surface finish:

- 1) anodizing (clear, satin, bronze, black, golden, silver, other multicolor)
- 2) electrophoresis
- 3) powder coating, PVDF, polishing, shot blasting, etc.

Standard:

Q/320281PDW01-2008

Specifications :

Item	Aluminum Extrusion Solar Panel Frame
Material	Alloy 6063, 6061 or according to customer' s choice
Temper	T3, T4, T5, T6
Surface	Anodize (clear, satin, bronze, black, golden, silver, other multicolor) , electrophoresis, powder coating, PVDF coating, wood grain painting, etc.
Color	Any color based on Standard Germany RAL Mark
MOQ	1 ton. Usually 12 tons for a 20 feet container; 24 tons for a 40 feet container.
Profile type	used as the frame of solar panel
Fabrication	1. Milling; 2. Drilling; 3. Bending; 4. Cutting.
Moulding	1. Using our moulds, free; 2. Using customer' s drawing, opening mould fee need to be paid.
Mould size	25*25, 35*35,30*46, 46*50, 30*25, 40*40 ,50*35,etc.We can provide customized aluminum solar frames upon to customers' request.
FOB Port	Shanghai, etc.

1. Alloy :6063,6061,6005 or according to customer' s choice

2.Material:Aluminum

3.Suface Treatment: Mill Finished,Anodized ,Electrophoretic coated,Powder spray coated,Fluorocarbon powder spray coated /PVDF Paint, Drawbench,Steel polished,Wood grain coated /Wooden transfer .













4.Deep process: Milling, Drilling, Bending,Cutting.

5.Application: Aluminum solar frame is widely used as the frame of solar panel.

6.Color:clear, satin, bronze, , golden, silver, other multicolor

7.Temper: T4, T5, T6 ,T66

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT001 G701		0.987	GT007 G007		0.803
GT002 角码为GT001 G702		0.530	GT008 G008		0.633
GT003 G795		0.615	GT009 G009		0.494
GT004 G794		0.466	GT010 G010		0.496
GT005 G590		0.814	GT011 G011		0.388
GT006 G591		0.681	GT012 G012		0.290

新图号	简 图	线密度 kg/m	新图号	简 图	线密度 kg/m
旧图号			旧图号		
GT013		0.372	GT019		0.665
G778			G599		
GT014		0.367	GT020		0.400
G594			G846		
GT015		0.183	GT021		0.884
G595			Z081		
GT016		0.248	GT022		1.228
G596			Z082		
GT017		0.534	GT023		0.952
G597			Z083		
GT018		0.339	GT024		1.073
G598			Z084		

线密度仅供参考，出货以实际称重为准！ 210

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT025 角码为GT026		0.653	GT031		0.548
G895			G893		
GT026		0.732	GT032		0.279
G896			G894		
GT027 角码为GT026		0.424	GT033		1.711
G915			G913		
GT028 角码为GT026		0.524	GT034 角码为GT033		0.745
G916			G914		
GT029		1.300	GT035		0.398
G822			G222		
GT030 角码为GT029		0.567	GT036		0.754
G823			G224		

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT037 G229		0.172	GT052		0.728
GT038 G230		0.374	GT054 角码为GT052		0.509
GT039 G889		0.626	GT055 角码为GT052		0.537
GT040 G888		0.756	GT061		0.161
GT041 角码为GT026 G187		0.692	GT062		0.340
GT042 角码为GT026 G789		0.443	GT063		0.209

线密度仅供参考，出货以实际磅重为准！ 212

新图号	简图	线密度 kg/m
旧图号		
GT064		0.394
GT068		0.497
GT069		0.613
GT070		0.312
角码为 GT050		
GT071		0.687
GT072		0.378

新图号	简图	线密度 kg/m
旧图号		
GT076		0.698
角码为 GT050		
GT077A		0.848
GT078A		0.635
GT079		0.524
GT080		0.651
GT081		0.395

213 线密度仅供参考, 出货以实际磅重为准!

HD太阳能系列型材图 国家免检

新图号 旧图号	简 图	线密度 kg/m
GT082		0.245
GT083		0.267
GT084		0.519
GT085		0.646
GT086		0.674
GT087		0.655

新图号 旧图号	简 图	线密度 kg/m
GT088		0.677
GT089		0.558
GT091 角钢为 GT092		0.580
G791		
GT092		0.967
G792		
GT093 角钢为 GT094		0.832
GT094		1.519

线密度仅供参考, 出货以实际磅重为准! **214**

Applications:

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



+86-13861643436



aluminum@hentec.com.cn



aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421