




Anodized Industrial Aluminium Profile Electrical Cover 6063 / 6061 Alloy

Our Product Introduction

for more products please visit us on aluminumextrusion-profiles.com

Basic Information

- Place of Origin: China
- Brand Name: Hentec
- Certification: SGS
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month

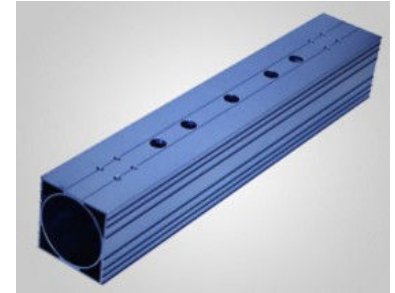

Product Specification

- Product Name: Industrial Aluminium Profile
- Alloy: 6063,6061
- Material: Aluminum
- Surface Treatment: ,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T5, T6
- Highlight: **aluminium door frame,
aluminium extruded profiles**

Product Description

Anodized Industrial Aluminium Profile Electrical Cover 6063 / 6061 Alloy

Description: Anodized Industrial Aluminium Profile Electrical Cover Use / Electrical Shell

Hentec Industrial Co., Ltd is professional serves for Building doors and windows profiles, Railway, Cars with aluminum, IT computer, Communications, Electrical, Mechanical, High-speed rail transportation, Refrigerated containers etc., special aluminum profiles for 17 years.

- 1 Business type: Real Big Manufacturer & Exporter with 17 years experience
- 2 Production Standard: Architecture Profile : GB 5237-2008
Industry Profile : GB/T6892-2008
- 3 Main products: Aluminum extrusion profiles for architectural & industrial, Different aluminum profile sections for different applications.
Aluminum Formwork for Building Construction.
- 4 Main Product Finishes: Mill finish, powder coating, anodized color, wooden pattern, Polyvinylidene Fluoride (PVDF)-Coating, Machine Polishing, Chemical Polishing, Mirror Polishing, Brushing Finish, thermal insulation of barrier strip, thermal insulation of filling-polyurethane
- 5 Price: Based on Guangdong Nanhai Lingtong Aluminium Ingot price + different finishes processing Fee + local cost
- 6 Payment term: T/T, L/C at sight
 - A. Alloy: 6063, 6060, 6061, 6005 etc
 - B. State: T5/T6
 - C. Length: 1m-13 m (polishing : 2.5 m)
 - D. Normal Anodizing thickness: 8-12 micro
 - E. Normal powder coating thickness: 60-100 micro
 - F. Tensile strength: ≥ 16 mpa
 - G. Yield strength: ≥ 110 mpa
 - H. Extensibility: $\geq 8\%$
 - I. Hardness(HW): ≥ 8
- 7 Specification:
 - F. Tensile strength: ≥ 16 mpa
 - G. Yield strength: ≥ 110 mpa
 - H. Extensibility: $\geq 8\%$
 - I. Hardness(HW): ≥ 8
- 8 Packing: Kraft paper, EPE Fram, Shrink film, Carton Box, Wooden box etc, Customized package is available.
- 9 MOQ: 1X20 FCL, Each profile not less than 500 kgs. Each color not less than 2 tons.
- 1 Sample time: 10-15 days after drawing confirmed and mold cost paid.
- 1 Delivery time: 35 days after deposit received.
- 1 Port: Shanghai Port

Order, payment, terms, shipment

- 1, Minimum order: 500kg per trial order 1 piece of sample free of charge provided by approval and kept for future mass production.
- 2, Sample Lead Time: 25 working days (15 days for making the tool and 10 days making the samples. Before sending the samples to customer, samples should pass strict test in our lab.) Production Lead time: it depends on customers' order quantity (30 working days after deposit).
- 3, Payment: (Can negotiate with customers, our usual practices are as follow)
- 4, Tooling: 100% prepaid by T/T.
- 5, Parts: 30% upon order confirmation and balance before delivery by T/T

Applications:

Aluminum profile used in cars, trains machinery, electronics, medical and other industrial filed. In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.

FAQ For Saving Your Precious Time!

Q1: What's the thickness for anodizing? Can you do 15um?

A: Our normal thickness is about 10 um. Yes, we can do 15um and above.

Q2: What color you can do for powder coating? The thickness for powder coat?

A: We can do any color for powder coat as long as you can provide the color sample. Our normally powder coating thickness is 60-80um.

Q3: What color you can do for wood grain?

A: Our most popular colors are Western Red Cedar, Australia Cedar, Jarrah I, Jarrah II, Chestnut, Bush Cherry, Bush Wood, Western Wood, Snow Gum, etc. If you need any other colors, we can do according to the color samples you provide.

Q4: How's the weather resistance for wood grain finish D1010?

A: (1). Powder: Akzo Noble Interpon D1010.

(2). Wood grain film: Italian Memphis.

(3). Standard complied: American AAMA Standard.2603

(4). UV test: 1000 hours.

(5). Salt spraying test: 1000 hours.

(6). Normal weather: 10 years color guarantee.

Q5: What certification do you have? What's your standard?

A: We have ISO certification. Our standard is DIN, AAMA, AS/NZS, China GB.

Q6: What's the delivery time for samples and mass production?

A: (1). 2-3 weeks to make the new moulds and make free samples.

(2). 3-4 weeks after receipt of deposit and confirmation of the order.



 +86-13861643436

 aluminum@hentec.com.cn

 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421