




Anodized Aluminum End Clamp For Solar Roof Mounting System / 35mm / 40mm / 45mm /50mm

Our Product Introduction

for more products please visit us on aluminumextrusion-profiles.com


Basic Information

- Place of Origin: China
- Brand Name: HT
- Certification: CA , CE
- Model Number: HENTEC rail splice
- Application: buildings,commercial,industrial
- Temper: T4, T5, T6 ,T66
- Surface Treatment: Mill Finished,Anodized, etc
- Material: Aluminum
- Alloy: 6063,6061,6005
- Product Name: Aluminum Curtain Wall Profile

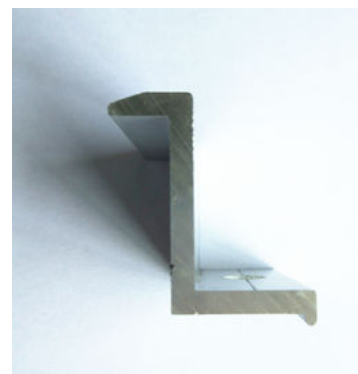

Product Specification

- Highlight: solar panel roof mounts, aluminum frames for solar panels

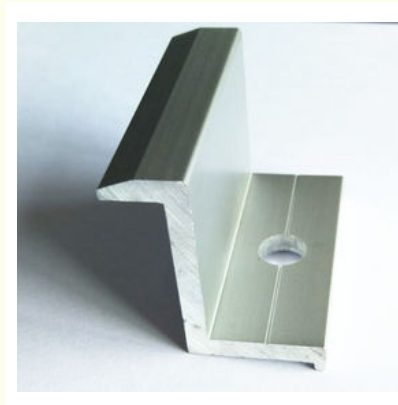


Product Description

Anodized Aluminum End Clamp For Solar Roof Mounting System / 35mm / 40mm / 45mm /50mm

Specifications solar end clamp

1. Aluminium 6005-T5
 2. Tilt-in nut easy install
 3. 7-10 days fast delivery
 4. AS/NZS 1170 Standard
 5. Material AL6005-T5 & SUS 304 bolt
 6. High class anodized aluminium
- Solar framed panel mounting end clamp

Solar Clamp	
End Clamp (Fix 35mm/40mm/45mm/50mm solar panel frame)	
Item NO	Specification
HT35	End Clamp 35mm
HT40	End Clamp 40mm
HT45	End Clamp 45mm
HT50	End Clamp 50mm



Features of mounting system

1. Widely Application

The structure is 100% made of anodized aluminum/galvanized steel, with the quality of corrosion-resistance, light-weight and strong intensity. It can be used in extremely bad installation condition.

2. Strong Compatibility

The structure can not only fit for different PV kits, but also work with different PV arrangements which can be interchange randomly.

3. Safety and Reliability

Load-bearing, wind resistance and seismic resistance has been given sufficient consideration. All of these functions have been tested extremely, which will ensure the safety of the system.

4. Easy Installation

Most of the parts can be pre-assembled on factory, which not only can save your install time, but also your cost.

5. Flexibility

Considering the construction error, the structure has been well-designed that make it can adjust flexibly.

6. Warranty

10-year warranty for the mounting system and 25 years service time.

Order, payment, terms, shipment

1, Minimum order: 500 kg per trial order 1 piece of sample free of charge provided by approval and kept for future mass production.

2, Sample Lead Time: 25 working days (15 days for making the tool and 10 days making the samples. Before sending the samples to customer, samples should pass strict test in our lab.) Production Lead time: it depends on customers' order quantity (30 working days after deposit).

3, Payment: L/C, T/T

Applications:

Aluminum profile used in cars, trains machinery, electronics, medical and other industrial filed. In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopted as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.



Specifications:

1. Primary Technical Data

1) Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest
6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest

2) Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

3. Surface Treatment of Sections

(Class)	(μm), not diminish than		acid-resistant			abrasion resistance
	(Min-average film thickness)	(Min-part film thickness)	CASS		(S)	(f, g /μm)
			(h)	Class		
AA10	10	8	16	≥9	≥50	≥300
AA15	15	12	32	≥9	≥75	≥300
AA20	20	16	56	≥9	≥100	≥300
AA25	25	20	72	≥9	≥125	≥300



Hentec Industry Co.,Ltd



Hentec Industry Co.,Ltd



Competitive Advantage:

1. Easy installation
2. Wide application
3. High quality solar clamps
4. Fast Delivery
5. Customized designed offer

FAQ For Saving Your Precious Time!

Q1:What's the thickness for anodizing?Can you do 15um?

A:Our normal thickness is about 10 um.Yes, we can do 15um and above.

Q2:What color you can do for powder coating?The thickness for powder coat?

A:We can do any color for powder coat as long as you can provide the color sample.Our normally powder coating thickness is 60-80um.

Q3:What color you can do for wood grain?

A:Our most popular colors are Western Red Cedar, Australia Cedar, Jarrah I, Jarrah II, Chestnut, Bush Cherry, Bush Wood, Western Wood, Snow Gum, etc.If you need any other colors, we can do according to the color samples you provide.

Q4:How's the weather resistance for wood grain finish D1010?

A:(1).Powder:Akzo Noble Interpon D1010.

(2).Wood grain film:Italian Memphis.

(3).Standard complied:American AAMA Standard.2603

(4).UV test:1000 hours.

(5).Salt spraying test:1000 hours.

(6).Normal weather:10 years color guarantee.

Q5:What certification do you have?What's your standard?

A:We have ISO certification.Our standard is DIN, AAMA, AS/NZS, China GB.

Q6:What's the delivery time for samples and mass production?

A:(1).2-3 weeks to make the new moulds and make free samples.

(2).3-4 weeks after receipt of deposit and confirmation of the order.

Tag :

solar panel roof mounting kits

solar panel roof mounting hardware



 +86-13861643436

 aluminum@hentec.com.cn

 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421