

## 6063 T5 Industrial 30x30mm Aluminium Profile System


### Basic Information

- Place of Origin: China
- Brand Name: Hentec
- Certification: CA ,CE ,ISO14001:2004, ISO9001:2000
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month



### Product Specification

- Product Name: Industrial Aluminium Profile
- Alloy: 6063
- Material: Aluminum
- Surface Treatment: Fluorocarbon Powder Spray Coated /PVDF Paint, Drawbench, Steel Polished
- Deep Process: Milling, Drilling, Bending, Cutting
- Temper: T4, T5, T6
- Highlight: **6063 t5 Aluminium Profile System, t5 6063 Aluminium Profile System, 30x30mm aluminium profile system**

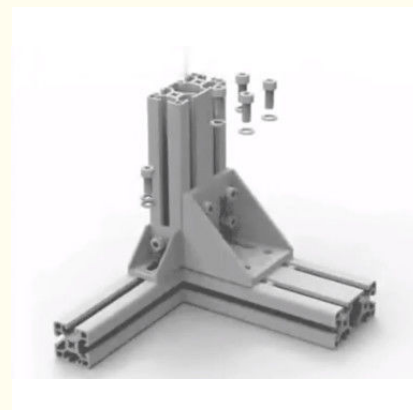

## Product Description

### Professional 6063 - T5 Industrial Aluminum Profile System T - Solt aluminum profile

#### Our aluminum profile is widely used in :

Heavy duty Racks  
Robot safety Fencing  
industrial safety fencing  
Industrial Material Handling Trolley  
Machine Frame

#### More Information:

1. Anodized Mill Finish Aluminium Extrusion as Your Drawing
2. Wallthickness:0.6mm--50mm
- 3.Length:Customized
- 4.Surface: Mill surface; anodizing surface; polished surface; powder coated surface; colorful anodizing surface
- 5.Process: Extrusion, surface treatment , cutting , machining
- 6.Size : 30\*30mm ,35\*35mm ,40\*40mm ,30\*60mm ,40\*80mm ...



#### Applications:

Industry Aluminum profile used in cars, trains machinery ,electronics, medical and other industrial filed . In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.



#### Specifications:

##### 1.Primary Technical Data

##### 1)Chemical composition

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Impurity	Al
6063	0.2-0.6	0.35	0.1	0.1	0.45-0.9	0.1	0.1	0.1	0.15	Rest
6061	0.4-0.8	0.7	0.15-0.4	0.15	0.8-1.2	0.04-0.35	0.25	0.15	0.15	Rest
6060	0.3-0.6	0.1-0.3	0.1	0.1	0.35-0.6	-	0.15	0.1	0.15	Rest

6005	0.6-0.9	0.35	0.1	0.1	0.40-0.6	0.1	0.1	0.1	0.15	Rest
------	---------	------	-----	-----	----------	-----	-----	-----	------	------

## 2)Mechanical property

Alloy	Temper	Tensile strength	Yield strength	Elongation
6063	T5	≥ 160Mpa	≥ 110Mpa	≥ 8%
	T6	≥ 205Mpa	≥ 180Mpa	≥ 8%
6061	T6	≥ 265Mpa	≥ 245Mpa	≥ 8%

公司图号	图 样	线密度 kg/m
HT-745		1.292
HT-746		0.786
HT-747		2.524
HT-749		0.464
HT-750		0.808
HT-751		1.616

公司图号	图 样	线密度 kg/m
HT-752		1.646
HT-753		2.952
HT-754		2.015
HT-767		1.522

## Competitive Advantage:

- 1)Engineering design and support.
- 2)Aluminum profiles deeply processing:cutting,punching,drilling,milling,and fabricating.
- 3)High Quality system, strictly inspection during production and whole inspection before package.
- 4)Good performance, product warranty for 15 years.
- 5).High corrosion resistance.
- 6).Good wear resistance & anti-scratch.
- 7).Size customized.



**HENTEC** Hentec Industry Co.,Ltd

☎ +86-13861643436    ✉ aluminum@hentec.com.cn    🌐 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421